



IEC 61558-2-2 EXV

Edition 3.0 2022-10
EXTENDED VERSION

INTERNATIONAL STANDARD



This extended version of IEC 61558-2-2:2022 includes the content of the references made to IEC 61558-1:2017

GROUP SAFETY PUBLICATION

**Safety of transformers, reactors, power supply units and combinations thereof –
Part 2-2: Particular requirements and tests for control transformers and power
supply units incorporating control transformers**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.180

ISBN 978-2-8322-5932-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	9
INTRODUCTION TO IEC 61558-1:2017	12
INTRODUCTION	15
1 Scope	16
2 Normative references	17
3 Terms and definitions	20
4 General requirements	34
5 General notes on tests	35
6 Ratings	37
7 Classification	38
8 Marking and other information	39
9 Protection against electric shock	45
9.1 General	45
9.2 Protection against contact with hazardous-live-parts	45
9.2.1 Determination of hazardous-live-parts	45
9.2.2 Accessibility to hazardous-live-parts	46
9.2.3 Accessibility to non hazardous-live-part	49
9.3 Protection against hazardous electrical discharge	49
10 Change of input voltage setting	49
11 Output voltage and output current under load	50
12 No-load output voltage	50
13 Short-circuit voltage	51
14 Heating	51
14.1 General requirements	51
14.1.1 Temperature-rise test	51
14.1.2 Alternative temperature-rise test	54
14.1.3 Determination of steady-state conditions	56
14.2 Application of 14.1 or 14.3 according to the insulation system	58
14.3 Accelerated ageing test for undeclared class of insulation system	59
14.3.1 General	59
14.3.2 Heat run	59
14.3.3 Vibration	59
14.3.4 Moisture treatment	60
14.3.5 Measurements	60
15 Short-circuit and overload protection	60
15.1 General requirements	60
15.1.1 Short circuit and overload test method	60
15.1.2 Alternative short circuit and overload test method	62
15.2 Inherently short-circuit proof transformers	62
15.3 Non-inherently short-circuit proof transformers	62
15.4 Non-short-circuit proof transformers	63
15.5 Fail-safe transformers	63

16	Mechanical strength	64
16.1	General	64
16.2	Stationary transformers	64
16.3	Portable transformers (except portable transformers with integral pins for introduction in socket-outlet in the fixed wiring)	65
16.4	Portable transformers provided with integral pins for introduction in socket-outlets of the fixed wiring	65
16.4.1	General requirements	65
16.4.2	Portable transformers provided with integral pins according to EN 50075 (IEC plug type C) for introduction in socket-outlets of the fixed wiring	66
16.5	Additional requirements for transformers to be used in vehicles and railway applications	67
16.5.1	Transformers to be used in vehicles and railway applications	67
16.5.2	Test requirements for the transportation of transformers	68
17	Protection against harmful ingress of dust, solid objects and moisture	69
17.1	Degrees of protection provided by enclosures (IP code)	69
17.1.1	General requirements	69
17.1.2	Tests on transformers with enclosure	70
17.2	Humidity treatment	72
18	Insulation resistance, dielectric strength and leakage current	73
18.1	General	73
18.2	Insulation resistance	73
18.3	Dielectric strength test	74
18.4	Insulation between and within windings	76
18.5	Touch current and protective earthing conductor current	76
18.5.1	General	76
18.5.2	Touch current	77
18.5.3	Protective earthing conductor current	78
19	Construction	78
19.1	General construction	78
19.1.3	Separating transformers	79
19.1.4	Isolating transformers and safety isolating transformers	80
19.2	Flammability of materials	82
19.3	Short-circuit characteristics of portable transformers	82
19.4	Class II transformer contact prevention of accessible conductive parts	83
19.5	Class II transformer insulation reassembling after service	83
19.6	Loosening of wires, screws or similar parts	83
19.7	Resistor or capacitor connection with accessible conductive parts	84
19.8	Bridging of separated conductive parts by resistors or capacitors	84
19.9	Insulating material separating input and output windings	84
19.10	Accidental contact protection against hazardous-live-parts provided by isolating coating	85
19.11	Insulating material of handles, operating levers, knobs and similar parts	86
19.12	Winding construction	86
19.13	Fixing of handles, operating levers and similar parts	90
19.14	Fixing of covers providing protection against electric shock	90
19.15	Strain on fixed socket-outlets caused by pin-transformers connection	90
19.16	Portable transformers for use in irregular or harsh conditions	91

19.17	Drain hole of transformers protected against ingress of water	91
19.18	Plug connected transformers protected against ingress of water	91
19.19	Flexible cable or flexible cord connection for class I portable transformers	91
19.20	SELV- and PELV-circuit separation of live parts.....	91
19.21	Protection against contact for FELV-circuit	92
19.22	Protective earthing regarding class II transformers	92
19.23	Protective earthing regarding class III transformers	92
20	Components	93
21	Internal wiring	98
22	Supply connection and other external flexible cables or cords	98
23	Terminals for external conductors.....	104
24	Provisions for protective earthing.....	106
25	Screws and connections.....	107
26	Creepage distances, clearances and distances through insulation	110
26.1	General.....	110
26.2	Creepage distances and clearances.....	111
26.2.1	General.....	111
26.2.2	Windings covered with adhesive tape.....	111
26.2.3	Uncemented insulating parts	111
26.2.4	Cemented insulating parts	111
26.2.5	Enclosed parts (e.g. by impregnation or potting).....	112
26.3	Distance through insulation.....	113
27	Resistance to heat, fire and tracking.....	124
27.1	General.....	124
27.2	Resistance to heat.....	124
27.2.1	General.....	124
27.2.2	External accessible parts	124
27.2.3	Internal parts.....	125
27.3	Resistance to abnormal heat under fault conditions	125
27.4	Resistance to fire.....	126
27.4.1	General.....	126
27.4.2	External accessible parts	127
27.4.3	Internal parts.....	127
27.5	Resistance to tracking	128
28	Resistance to rusting.....	128
Annex A (normative) Measurement of creepage distances and clearances		129
Annex B (normative) Testing a series of transformers.....		133
B.1	General.....	133
B.2	Requirements	133
B.3	Constructional inspection.....	134
Annex C (void).....		135
Annex D (void).....		136
Annex E (normative) Glow-wire test		137
E.1	General.....	137
E.2	Severity.....	137
E.3	Conditioning	137

E.4	Test procedure	137
Annex F (normative) Requirements for manually operated switches which are parts of transformers assembly		138
F.1	General	138
F.2	Switches tested as a separate component	138
F.3	Switches tested as part of the transformer	138
Annex G (normative) Tracking test.....		141
G.1	General	141
G.2	Test specimen	141
G.3	Test apparatus	141
G.4	Procedure	141
Annex H (normative) Electronic circuits.....		142
H.1	General	142
H.2	General notes on tests (addition to Clause 5)	142
H.3	Short circuit and overload protection (addition to Clause 15)	142
H.4	Creepage distances, clearances and distances through insulation (addition to Clause 26).....	144
Annex I (informative) Dimensions for rectangular cross-section connectors of transformers, basic dimensions and coordination		146
Annex J (normative) Measuring network for touch-currents.....		149
Annex K (normative) Insulated winding wires		150
K.1	General	150
K.2	Type tests	150
K.2.1	General.....	150
K.2.2	Dielectric strength test.....	150
K.2.3	Flexibility and adherence	150
K.2.4	Heat shock.....	151
K.2.5	Retention of dielectric strength after bending.....	151
K.3	Testing during manufacturing.....	152
K.3.1	General.....	152
K.3.2	Routine test.....	152
K.3.3	Sampling test	152
Annex L (normative) Routine tests (production tests).....		153
L.1	General	153
L.2	Protective earthing continuity test.....	153
L.3	Checking of no-load output voltage	153
L.4	Dielectric strength test.....	153
L.5	Checking of protective devices mounting.....	154
L.6	Visual inspection	154
L.7	Repetition test after routine dielectric strength test	154
Annex M (informative) Examples to be used as a guide for 19.1		155
M.1	General	155
M.2	Coil-former	155
M.2.1	Concentric type	155
M.2.2	Side-by-side type.....	156
M.3	Windings	156
M.3.1	Without screen	156
M.3.2	With screen	157

Annex N (informative) Examples for checking points of dielectric strength test voltages.....	158
Annex O (void).....	160
Annex P (informative) Examples for measurement points of creepage distances and clearances	161
Annex Q (informative) Explanation of IP numbers for degrees of protection.....	164
Q.1 General.....	164
Q.2 Degrees of protection against access to hazardous parts and against solid foreign objects.....	164
Q.3 Degrees of protection against ingress of water	166
Annex R (normative) Explanations of the application of 6.1.2.2.1 of IEC 60664-1:2007.....	167
R.1 Impulse dielectric test.....	167
R.2 Example.....	167
Annex S (void).....	169
Annex T (void).....	170
Annex U (void).....	171
Annex V (informative) Symbols to be used for thermal cut-outs.....	172
V.1 General.....	172
V.2 Non-self-resetting thermal cut-out (see 3.3.4).....	172
V.3 Self-resetting thermal cut-out (see 3.3.3).....	172
Annex W (normative) Coated printed circuit boards.....	173
W.1 Preamble.....	173
W.2 General.....	173
W.3 Cold.....	173
W.4 Rapid change of temperature.....	173
W.5 Additional tests.....	173
Bibliography.....	174
Index of defined terms.....	176
Figure 1 – IEC 61558 principle	13
Figure 2 – Mounting box for flush-type transformer.....	37
Figure 3 – Test pin (see IEC 61032, test probe 13).....	47
Figure 4 – Standard test finger (see IEC 61032, test probe B)	48
Figure 5 – Example of back-to-back method – Single phase	55
Figure 6 – Example of back-to-back method – Three phase.....	56
Figure 7 – Amplitude spectrum density for random testing	68
Figure 8 – Normalised spectrum of shock.....	69
Figure 9 – Test voltage sequence	76
Figure 10 – Test configuration: single-phase equipment on star TN or TT system.....	78
Figure 11 – Abrasion resistance test for insulating coated layers	86
Figure 12 – Flexing test apparatus.....	102
Figure 13 – Test arrangement for checking mechanical withstanding of insulating materials in thin sheet layers	116
Figure 14 – Ball-pressure apparatus	124
Figure A.1 – Example 1	129
Figure A.2 – Example 2	130
Figure A.3 – Example 3	130

Figure A.4 – Example 4	130
Figure A.5 – Example 5	131
Figure A.6 – Example 6	131
Figure A.7 – Example 7	132
Figure A.8 – Example 8	132
Figure H.1 – Example of an electronic circuit with low-power points	145
Figure J.1 – Measuring network for touch-current	149
Figure M.1 – Examples for concentric type constructions	155
Figure M.2 – Examples for side-by-side type constructions	156
Figure M.3 – Examples for winding constructions without screen	156
Figure M.4 – Examples for wrapped winding constructions	157
Figure M.5 – Examples for winding constructions with screen	157
Figure N.1 – Transformer of class I construction with metal enclosure	158
Figure N.2 – Transformer of class II construction with metal enclosure	159
Figure N.3 – Transformer of class II construction with enclosure of insulating material	159
Figure P.1 – Transformer of class I construction	161
Figure P.2 – Transformer of class I construction with earthed metal screen	162
Figure P.3 – Transformer of class II construction with metal enclosure	162
Figure P.4 – Transformer of class II construction with enclosure of insulating material	163
Figure V.1 – Restored by manual operation	172
Figure V.2 – Restored by disconnection of the supply	172
Figure V.3 – Thermal link (see 3.3.5)	172
Figure V.4 – Self-resetting thermal cut-out	172
Table 1 – Symbols used on equipment or in instructions	42
Table 101 – Symbols indicating the kind of transformer	43
Table 2 – Values of maximum temperatures in normal use	57
Table 3 – Explanation of the maximum winding temperatures required in Table 2	58
Table 4 – Test temperature and testing time (in days) per cycle	59
Table 5 – Maximum values of temperatures under short-circuit or overload conditions	61
Table 6 – Values of T and k for fuses	62
Table 7 – Pull force on pins	66
Table 8 – Conditions for vibration testing (random)	67
Table 9 – Amplitude spectrum density ASD values for accelerated life testing	67
Table 10 – Frequency values depending on the weight of the specimen	68
Table 11 – Excitation values for vibration testing	68
Table 12 – Solid-object-proof transformer test	71
Table 13 – Values of insulation resistance	74
Table 14 – Table of dielectric strength test voltages	75
Table 15 – Limits for currents	78
Table 16 – Nominal cross-sectional areas of external flexible cables or cords	100
Table 17 – Pull and torque to be applied to external flexible cables or cords fixed to stationary and portable transformers	104

Table 18 – Torque to be applied to screws and connections	108
Table 19 – Torque test on glands.....	110
Table 20 – Clearances in mm	117
Table 21 – Creepage distances in mm	118
Table 22 – Distance through insulation in mm	119
Table 23 – Creepage distances and clearance between terminals for external connection ..	120
Table 24 – Values of FIW wires with minimum overall diameter and minimum test voltages according to the total enamel increase	122
Table A.1 – Width of groove values depending on the pollution degree	129
Table F.1 – Peak surge current of additional loads	139
Table I.1 – Dimensions of rectangular copper connectors	147
Table K.1 – Mandrel diameter.....	151
Table K.2 – Oven temperature	151
Table Q.1 – Degrees of protection against access to hazardous parts indicated by the first characteristic numeral	165
Table Q.2 – Degrees of protection against solid foreign objects indicated by the first characteristic numeral	165
Table Q.3 – Degrees of protection indicated by the second characteristic numeral	166
Table R.1 – Impulse test voltage according to 6.1.2.2.1 of IEC 60664-1:2007.....	167

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SAFETY OF TRANSFORMERS, REACTORS, POWER SUPPLY UNITS AND COMBINATIONS THEREOF –

Part 2-2: Particular requirements and tests for control transformers and power supply units incorporating control transformers

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This extended version (EXV) of the official IEC Standard provides the user with a comprehensive content of the Standard.

IEC 61558-2-2:2022 EXV includes the content of the references made to IEC 61558-1:2017.

Particular subclauses of IEC 61558-1:2017 are displayed in the content on a blue background.

International standard IEC 61558-2-2 has been prepared by IEC technical committee 96: Transformers, reactors, power supply units and combinations thereof.

This third edition cancels and replaces the second edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

adjustment of structure and references in accordance with IEC 61558-1:2017;
 new general symbol for control transformers;
 new symbol for power supply unit with linearly regulated output voltage.

The text of this document is based on the following documents:

Draft	Report on voting
96/548/FDIS	96/554/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this document is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

It has the status of a group safety publication in accordance with IEC Guide 104.

This document is to be used in conjunction with IEC 61558-1:2017.

This document supplements or modifies the corresponding clauses in IEC 61558-1:2017, so as to convert that publication into the IEC standard: *Particular requirements and tests for control transformers and power supply units incorporating control transformers*.

A list of all parts in the IEC 61558 series published under the general title *Safety of transformers, reactors, power supply units and combinations thereof*, can be found on the IEC website.

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

Where this document states "*addition*", "*modification*" or "*replacement*", the relevant text of IEC 61558-1:2017 is to be adopted accordingly.

In this document, the following print types are used:

- requirements proper: in roman type;
- test specifications: *in italic type*;
- explanatory matter: in smaller roman type.

In the text of this document, the words in **bold** are defined in Clause 3.

Subclauses, notes, figures and tables additional to those in IEC 61558-1:2017 are numbered starting from 101; supplementary annexes are entitled AA, BB, etc.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under www.webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION TO IEC 61558-1:2017

This document covers safety requirements for **transformers**. Where the term **transformer** is used, it covers **transformers**, **reactors** and **power supply units** where applicable.

During the development of this document, to the extent possible, the requirements of IEC 60364 (all parts) were taken into consideration, so that a **transformer** can be installed in accordance with the wiring rules contained in that document. However, national wiring rules can differ.

This document recognizes the internationally accepted levels of protection against the possible electrical, mechanical, and fire hazards caused by **transformers** operating under normal conditions in accordance with the manufacturer's instructions. It also covers abnormal conditions which can occur in practice.

A **transformer** complying with this document will not necessarily be judged to comply with the safety principles of this document if, when examined and tested, it is found to have other features that impair the level of safety covered by these requirements.

A **transformer** employing materials or having forms of construction differing from those detailed in this document may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be judged to comply with the safety principles of this document.

The document dealing with non-safety aspects of electromagnetic compatibility (EMC) of **transformers** is IEC 62041. However, that document also includes tests that can subject the **transformer** to conditions involving safety aspects.

The objective of IEC 61558-1 is to provide a set of requirements and tests considered to be generally applicable to most types of **transformers**, and which can be called up as required by the relevant part of IEC 61558-2. IEC 61558-1 is thus not to be regarded as a specification by itself for any type of **transformer**, and its provisions apply only to particular types of **transformers** to the extent determined by the appropriate part of IEC 61558-2. IEC 61558-1 also contains normative routine tests.

Each part of IEC 61558-2 in conjunction with this document contains all the necessary requirements for the **transformer** being covered and does not contain references to other parts of IEC 61558-2. For **transformers** with a protection index IP00 and associated **transformers**, it is possible to have circuits corresponding to different parts of IEC 61558-2 within the same construction (e.g. SELV output circuit according to IEC 61558-2-6 and a 230 V output circuit according to IEC 61558-2-4). However, if the **transformer** is covered by different parts IEC 61558-2, to the extent reasonable, the relevant part of IEC 61558-2 is applied to each function/application separately. If applicable, the effect of one function on the other is taken into consideration.

If an appropriate part of IEC 61558-2 does not exist for a particular **transformer** or group of **transformers**, the nearest applicable part may be used as a guide to the requirements and tests.

However, individual countries may wish to consider its application, to the extent reasonable, to transformers not mentioned in the IEC 61558-2 series, and to transformers designed on new principles.

Where the requirements of any of the clauses of a part of IEC 61558-2 refer to IEC 61558-1 by the phrase "This clause of Part 1 is applicable", this phrase means that all the requirements of that clause of IEC 61558-1 are applicable, except those requirements that are clearly not applicable to the particular type of **transformer** covered by that part of IEC 61558-2.

The principle for the preparation of the different parts of IEC 61558-2 is as shown in Figure 1.

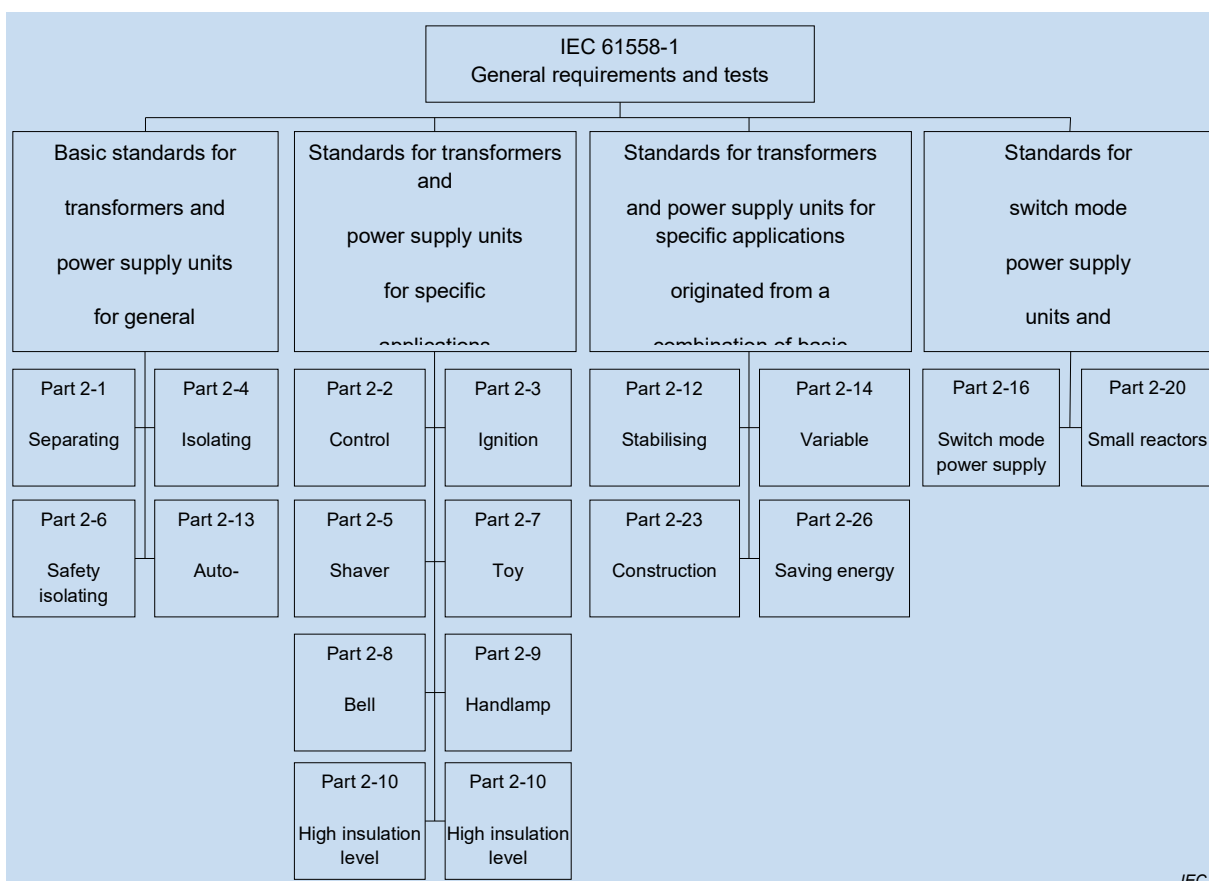


Figure 1 – IEC 61558 principle

Relevant clauses of this document (e.g. clauses dealing with thermal endurance test for windings) apply also to **transformers** forming an integral part of an appliance and which cannot be tested separately.

The IEC 61558 series consists of the following parts, under the general title *Safety of transformers, reactors, power supply units and combination thereof*:¹

- Part 1: General requirements and tests
- Part 2-1: Particular requirements and tests for separating transformers for general applications
- Part 2-2: Particular requirements and tests for control transformers
- Part 2-3: Particular requirements and tests for ignition transformers for gas and oil burners
- Part 2-4: Particular requirements and tests for isolating transformers
- Part 2-5: Particular requirements and tests for shaver transformers and shaver supply units
- Part 2-6: Particular requirements and tests for safety isolating transformers
- Part 2-7: Particular requirements and tests for transformers for toys
- Part 2-8: Particular requirements and tests for transformers for bells and chimes
- Part 2-9: Particular requirements and tests for transformers for class III handlamps for tungsten filament lamps

¹ Some of the parts of this series published earlier appeared under the general title *Safety of power transformers, power supplies, reactors and similar products or Safety of power transformers, power supply units and similar or Safety of power transformers, power supply units and similar devices*. Future editions of these parts will be issued under the new general title indicated above.

- Part 2-10: Particular requirements and tests for separating transformers with high insulation level and separating transformers with output voltages exceeding 1 000 V
 - Part 2-12: Particular requirements and tests for constant voltage transformers
 - Part 2-13: Particular requirements and tests for auto transformers
 - Part 2-14: Particular requirements and tests for variable transformers
 - Part 2-15: Particular requirements and tests for isolating transformers for the supply of medical locations
 - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units
 - Part 2-20: Particular requirements and tests for small reactors
 - Part 2-23: Particular requirements and tests for transformers and power supply units for construction sites
 - Part 2-26: Particular requirements and tests for transformers and power supply units all for saving energy and other purposes
- Other parts are under consideration.

INTRODUCTION

IEC TC 96 has a group safety function in accordance with IEC Guide 104 for transformers other than those intended to supply distribution networks, in particular transformers and power supply units intended to allow the application of protective measures against electric shock as defined by TC 64, but in certain cases including the limitation of voltage and horizontal safety function for SELV, in accordance with IEC 60364-4-41.

The group safety function (GSF) is used because of responsibility for example for safety extra-low voltage (SELV) in accordance with IEC 61140:2016, 5.2.6 and IEC 60364-4-41:2005, 414.3.1 or control circuits in accordance with IEC 60204-1:2016, 7.2.4.

The group safety function is used for each part of the IEC 61558-2 series because different standards of the IEC 61558 series can be combined in one construction but in certain cases with no limitation of rated output power.

For example an auto-transformer in accordance with IEC 61558-2-13 can be designed with a separate SELV-circuit in accordance with the particular requirements for IEC 61558-2-6 relating to the general requirements of IEC 61558-1.

SAFETY OF TRANSFORMERS, REACTORS, POWER SUPPLY UNITS AND COMBINATIONS THEREOF –

Part 2-2: Particular requirements and tests for control transformers and power supply units incorporating control transformers

1 Scope

This part of IEC 61558 deals with the safety of **control transformers** and **power supply units** incorporating **control transformers**. **Transformers** incorporating **electronic circuits** are also covered by this document.

NOTE 1 Safety includes electrical, thermal and mechanical aspects.

Unless otherwise specified, from here onward, the term **transformer** covers **control transformers** and **power supply units** incorporating **control transformers**.

For **power supply units** (linear) this document is applicable. For **switch mode power supply units** IEC 61558-2-16 is applicable together with this document. Where two requirements are in conflict, the most severe take precedence.

This document does not apply to **transformers** covered by IEC 60076-11.

This document is applicable to **stationary** or **portable**, single-phase or polyphase, air-cooled (natural or forced) **independent** or **associated dry-type transformers**. The windings can be encapsulated or non-encapsulated.

The **rated supply voltage** does not exceed 1 000 V AC and the **rated supply frequency** and the **internal operating frequencies** do not exceed 500 Hz.

The **rated thermal output** does not exceed:

- 25 kVA for single-phase **transformers**,
- 40 kVA for polyphase **transformers**.

This document is applicable to **transformers** without limitation of the **rated thermal output**, subject to an agreement between the purchaser and the manufacturer.

NOTE 2 **Transformers** intended to supply networks are not included in the scope.

The **no-load output voltage** or the **rated output voltage** does not exceed 1 000 V AC or 1 415 V ripple-free DC. For **independent transformers** the **no-load output voltage** and / or the **rated output voltage** is not less than 50 V AC or 120 V ripple-free DC.

This document is not applicable to external circuits and their components intended to be connected to the input terminals and output terminals of the **transformers**.

NOTE 3 **Transformers** covered by this document are only used in applications where double or reinforced insulation between circuits is not required by the installation rules or by the end product standard.

NOTE 4 Normally the **control transformers** are intended to be used with equipment to provide voltages different from the supply voltage for the functional requirements of the equipment. The protection against electric shock can be provided or completed by other features of the equipment, such as the **body**. Parts of **output circuits** can be connected to the **input circuits** or to protective earthing.

Attention is drawn to the following, if necessary:

- for **transformers** intended to be used in vehicles, on board ships, and aircraft, additional requirements (from other applicable standards, national rules, etc.);
- measures to protect the **enclosure** and the components inside the enclosure against external influences such as fungus, vermin, termites, solar-radiation, and icing;
- the different conditions for transportation, storage, and operation of the **transformers**;
- additional requirements in accordance with other appropriate standards and national rules can be applicable to **transformers** intended for use in special environments.

Future technological development of **transformers** can necessitate a need to increase the upper limit of the frequencies. Until then this document can be used as a guidance document.

This group safety publication focusing on safety guidance is primarily intended to be used as a product safety standard for the products mentioned in the scope but is also intended to be used by technical committees in the preparation of publications for products similar to those mentioned in the scope of this group safety publication, in accordance with the principles laid down in IEC Guide 104 and ISO/IEC Guide 51.

One of the responsibilities of a technical committee is, wherever applicable, to make use of basic safety publications and/or group safety publications in the preparation of its publications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60065:2014, *Audio, video and similar electronic apparatus – Safety requirements*

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test FC: Vibration (sinusoidal)*

IEC 60068-2-14, *Environmental testing – Part 2-14: Tests – Test N: Change of temperature*

IEC 60068-2-31, *Environmental testing – Part 2-31: Tests – Test Ec: Rough handling shocks, primarily for equipment-type specimens*

IEC 60068-2-75, *Environmental testing – Part 2-75: Tests – Test Eh: Hammer tests*

IEC 60076-1, *Power transformers – Part 1: General*

IEC 60076-11:2004, *Power transformers – Part 11: Dry-type transformers*

IEC TR 60083, *Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC*

IEC 60085:2007, *Electrical insulation – Thermal evaluation and designation*

IEC 60112:2003, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60127 (all parts), *Miniature fuses*

IEC 60127-3, *Miniature fuses – Part 3: Sub-miniature fuse-links*

IEC 60216 (all parts), *Electrical insulating materials – Thermal endurance properties*

IEC 60227 (all parts), *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V*

IEC 60227-5:2011, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V – Part 5: Flexible cables (cords)*

IEC 60245 (all parts), *Rubber insulated cables – Rated voltages up to and including 450/750 V*

IEC 60245-4:2011, *Rubber insulated cables – Rated voltages up to and including 450/750 V – Part 4: Cords and flexible cables*

IEC 60269 (all parts), *Low voltage fuses*

IEC 60269-2:2013, *Low voltage fuses – Part 2: Supplementary requirements for fuses for use by authorized persons (fuses mainly for industrial application) – Examples of standardized systems of fuses A to K*

IEC 60269-3:2010, *Low voltage fuses – Part 3: Supplementary requirements for fuses for use by unskilled persons (fuses mainly for household or similar applications) – Examples of standardized systems of fuses A to F*

IEC 60309 (all parts), *Plugs, socket-outlets and couplers for industrial purposes*

IEC 60317 (all parts), *Specifications for particular types of windings wires*

IEC 60317-0-7:2012, *Specifications for particular types of winding wires – Part 0-7: General requirements – Fully insulated (FIW) zero-defect enamelled round copper wire with nominal conductor diameter of 0,040 mm to 1,600 mm*

IEC 60317-56, *Specifications for particular types of winding wires – Part 56: Solderable fully insulated (FIW) zero-defect polyurethane enamelled round copper wire with nominal conductor diameter 0,040 mm to 1,600 mm, class 180*

IEC 60320 (all parts), *Appliance couplers for household and similar general purposes*

IEC 60320-2-3, *Appliance couplers for household and similar general purposes – Part 2-3: Appliance couplers with a degree of protection higher than IPX0*

IEC 60384-14:2013, *Fixed capacitors for use in electronic equipment – Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*

IEC 60417, *Graphical symbols for use on equipment*
(available at <http://www.graphical-symbols.info/equipment>)

IEC 60454 (all parts), *Pressure-sensitive adhesive tapes for electrical purposes*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*
IEC 60529:1989/AMD1:1999
IEC 60529:1989/AMD2:2013

IEC 60664-1:2007, *Insulation coordination for equipment within low voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3:2016, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 60691:2015, *Thermal-links – Requirements and application guide*

IEC 60695-2-10:2013, *Fire hazard testing – Part 2-10: Glowing/hot-wire based test methods – Glow-wire apparatus and common test procedure*

IEC 60695-2-11:2014, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end-products*

IEC 60721-3-2, *Classification of environmental conditions – Part 3: Classification of groups of environmental parameters and their severities – Section 2: Transportation*

IEC 60730 (all parts), *Automatic electrical controls*

IEC 60730-1:2013, *Automatic electrical controls – Part 1: General requirements*

IEC 60851-3:2009, *Winding wires – Test methods: Part 3: Mechanical properties*

IEC 60851-5:2008, *Winding wires – Test methods: Part 5: Electrical properties*

IEC 60851-6:2012, *Winding wires – Test methods: Part 6: Thermal properties*

IEC 60884-1:2002, *Plugs and socket-outlets for household and similar purposes – Part 1: General requirements*

IEC 60884-1:2002/AMD1:2006

IEC 60884-1:2002/AMD2:2013

IEC 60884-2-4, *Plugs and socket-outlets for household and similar purposes – Part 2-4: Particular requirements for plugs and socket-outlets for SELV*

IEC 60898 (all parts), *Electrical accessories – Circuit-breakers for overcurrent protection for household and similar installations*

IEC 60906-1, *IEC system of plugs and socket-outlets for household and similar purposes – Part 1: Plugs and socket-outlets 16 A 250 V a.c.*

IEC 60906-3, *IEC system of plugs and socket-outlets for household and similar purposes – Part 3: SELV plugs and socket-outlets, 16 A 6 V, 12 V, 24 V, 48 V, a.c. and d.c.*

IEC 60947-7-1, *Low-voltage switchgear and controlgear – Part 7-1: Ancillary equipment – Terminal blocks for copper conductors*

IEC 60990:2016, *Methods of measurement of touch current and protective conductor current*

IEC 60998-2-1, *Connecting devices for low-voltage circuits for household and similar purposes – Part 2-1: Particular requirements for connecting devices as separate entities with screw-type clamping units*

IEC 60998-2-2, *Connecting devices for low-voltage circuits for household and similar purposes – Part 2-2: Particular requirements for connecting devices as separate entities with screwless-type clamping units*

IEC 60999-1, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm² up to 35 mm² (included)*

IEC 61032, *Protection of persons and equipment by enclosures – Probes for verification*

IEC 61058-1:2016, *Switches for appliances – Part 1: General requirements*

IEC 61058-1-1:2016, *Switches for appliances – Part 1-1: Requirements for mechanical switches*

IEC 61140:2016, *Protection against electric shock – Common aspects for installation and equipment*

IEC 61373, *Railway applications – Rolling stock equipment – Shock and vibration tests*

IEC 61558-1:2017, *Safety of transformers, reactors, power supply units and combinations thereof – Part 1: General requirements and tests*

IEC 61558-2-16:2021, *Safety of transformers, reactors, power supply units and combinations thereof – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units for general applications*

ISO 8820 (all parts), *Road vehicles – Fuse-links*

EN 50075:1990, *Specification for flat non-wirable two-pole plugs 2.5 A 250 V, with cord, for the connection of class II-equipment for household and similar purposes*

DIN 43671:1975, *Copper bus bars; design for continuous current*

DIN 43670:1975, *Aluminium bus bars; design for continuous current*

DIN 43670-2:1985, *Aluminium bus bars copper cladding; design for continuous current*

CONTENTS

FOREWORD	3
INTRODUCTION	5
1 Scope	6
2 Normative references	7
3 Terms and definitions	7
4 General requirements	8
5 General notes on tests	8
6 Ratings	8
7 Classification	9
8 Marking and other information	9
9 Protection against electric shock	10
10 Change of input voltage setting	10
11 Output voltage and output current under load	11
12 No-load output voltage	11
13 Short-circuit voltage	12
14 Heating	12
15 Short-circuit and overload protection	12
16 Mechanical strength	12
17 Protection against harmful ingress of dust, solid objects and moisture	12
18 Insulation resistance, dielectric strength and leakage current	12
19 Construction	13
20 Components	14
21 Internal wiring	14
22 Supply connection and other external flexible cables or cords	14
23 Terminals for external conductors	14
24 Provisions for protective earthing	14
25 Screws and connections	14
26 Creepage distances, clearances and distances through insulation	14
27 Resistance to heat, fire and tracking	14
28 Resistance to rusting	14
Annexes	15
Bibliography	16
Table 101 – Symbols indicating the kind of transformer	10

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SAFETY OF TRANSFORMERS, REACTORS, POWER SUPPLY UNITS AND COMBINATIONS THEREOF –

Part 2-2: Particular requirements and tests for control transformers and power supply units incorporating control transformers

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International standard IEC 61558-2-2 has been prepared by IEC technical committee 96: Transformers, reactors, power supply units and combinations thereof.

This third edition cancels and replaces the second edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) adjustment of structure and references in accordance with IEC 61558-1:2017;
- b) new general symbol for control transformers;
- c) new symbol for power supply unit with linearly regulated output voltage.

The text of this document is based on the following documents:

Draft	Report on voting
96/548/FDIS	96/554/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this document is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

It has the status of a group safety publication in accordance with IEC Guide 104.

This document is to be used in conjunction with IEC 61558-1:2017.

This document supplements or modifies the corresponding clauses in IEC 61558-1:2017, so as to convert that publication into the IEC standard: *Particular requirements and tests for control transformers and power supply units incorporating control transformers*.

A list of all parts in the IEC 61558 series published under the general title *Safety of transformers, reactors, power supply units and combinations thereof*, can be found on the IEC website.

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

Where this document states "*addition*", "*modification*" or "*replacement*", the relevant text of IEC 61558-1:2017 is to be adopted accordingly.

In this document, the following print types are used:

- requirements proper: in roman type;
- test specifications: *in italic type*;
- explanatory matter: in smaller roman type.

In the text of this document, the words in **bold** are defined in Clause 3.

Subclauses, notes, figures and tables additional to those in IEC 61558-1:2017 are numbered starting from 101; supplementary annexes are entitled AA, BB, etc.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under www.webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

IEC TC 96 has a group safety function in accordance with IEC Guide 104 for transformers other than those intended to supply distribution networks, in particular transformers and power supply units intended to allow the application of protective measures against electric shock as defined by TC 64, but in certain cases including the limitation of voltage and horizontal safety function for SELV, in accordance with IEC 60364-4-41.

The group safety function (GSF) is used because of responsibility for example for safety extra-low voltage (SELV) in accordance with IEC 61140:2016, 5.2.6 and IEC 60364-4-41:2005, 414.3.1 or control circuits in accordance with IEC 60204-1:2016, 7.2.4.

The group safety function is used for each part of the IEC 61558-2 series because different standards of the IEC 61558 series can be combined in one construction but in certain cases with no limitation of rated output power.

For example an auto-transformer in accordance with IEC 61558-2-13 can be designed with a separate SELV-circuit in accordance with the particular requirements for IEC 61558-2-6 relating to the general requirements of IEC 61558-1.

SAFETY OF TRANSFORMERS, REACTORS, POWER SUPPLY UNITS AND COMBINATIONS THEREOF –

Part 2-2: Particular requirements and tests for control transformers and power supply units incorporating control transformers

1 Scope

Replacement:

This part of IEC 61558 deals with the safety of **control transformers** and **power supply units** incorporating **control transformers**. **Transformers** incorporating **electronic circuits** are also covered by this document.

NOTE 1 Safety includes electrical, thermal and mechanical aspects.

Unless otherwise specified, from here onward, the term **transformer** covers **control transformers** and **power supply units** incorporating **control transformers**.

For **power supply units** (linear) this document is applicable. For **switch mode power supply units** IEC 61558-2-16 is applicable together with this document. Where two requirements are in conflict, the most severe take precedence.

This document does not apply to **transformers** covered by IEC 60076-11.

This document is applicable to **stationary** or **portable**, single-phase or polyphase, air-cooled (natural or forced) **independent** or **associated dry-type transformers**. The windings can be encapsulated or non-encapsulated.

The **rated supply voltage** does not exceed 1 000 V AC and the **rated supply frequency** and the **internal operating frequencies** do not exceed 500 Hz.

The **rated thermal output** does not exceed:

- 25 kVA for single-phase **transformers**,
- 40 kVA for polyphase **transformers**.

This document is applicable to **transformers** without limitation of the **rated thermal output**, subject to an agreement between the purchaser and the manufacturer.

NOTE 2 **Transformers** intended to supply networks are not included in the scope.

The **no-load output voltage** or the **rated output voltage** does not exceed 1 000 V AC or 1 415 V ripple-free DC. For **independent transformers** the **no-load output voltage** and / or the **rated output voltage** is not less than 50 V AC or 120 V ripple-free DC.

This document is not applicable to external circuits and their components intended to be connected to the input terminals and output terminals of the **transformers**.

NOTE 3 **Transformers** covered by this document are only used in applications where double or reinforced insulation between circuits is not required by the installation rules or by the end product standard.

NOTE 4 Normally the **control transformers** are intended to be used with equipment to provide voltages different from the supply voltage for the functional requirements of the equipment. The protection against electric shock can be provided or completed by other features of the equipment, such as the **body**. Parts of **output circuits** can be connected to the **input circuits** or to protective earthing.

Attention is drawn to the following, if necessary:

- for **transformers** intended to be used in vehicles, on board ships, and aircraft, additional requirements (from other applicable standards, national rules, etc.);
- measures to protect the **enclosure** and the components inside the enclosure against external influences such as fungus, vermin, termites, solar-radiation, and icing;
- the different conditions for transportation, storage, and operation of the **transformers**;
- additional requirements in accordance with other appropriate standards and national rules can be applicable to **transformers** intended for use in special environments.

Future technological development of **transformers** can necessitate a need to increase the upper limit of the frequencies. Until then this document can be used as a guidance document.

This group safety publication focusing on safety guidance is primarily intended to be used as a product safety standard for the products mentioned in the scope but is also intended to be used by technical committees in the preparation of publications for products similar to those mentioned in the scope of this group safety publication, in accordance with the principles laid down in IEC Guide 104 and ISO/IEC Guide 51.

One of the responsibilities of a technical committee is, wherever applicable, to make use of basic safety publications and/or group safety publications in the preparation of its publications.

2 Normative references

This clause of IEC 61558-1:2017 is applicable except as follows:

Addition:

IEC 61558-1:2017, *Safety of transformers, reactors, power supply units and combinations thereof – Part 1: General requirements and tests*

IEC 61558-2-16:2021, *Safety of transformers, reactors, power supply units and combinations thereof – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units for general applications*

SOMMAIRE

AVANT-PROPOS	19
INTRODUCTION	22
1 Domaine d'application	23
2 Références normatives	24
3 Termes et définitions	25
4 Exigences générales	25
5 Généralités sur les essais.....	25
6 Caractéristiques assignées.....	26
7 Classification	26
8 Marquage et indications.....	26
9 Protection contre les chocs électriques.....	28
10 Changement de la tension primaire d'alimentation	28
11 Tension secondaire et courant secondaire en charge	28
12 Tension secondaire à vide	28
13 Tension de court-circuit	29
14 Echauffements.....	29
15 Protection contre les courts-circuits et les surcharges	29
16 Résistance mécanique.....	29
17 Protection contre les effets nuisibles dus à la pénétration de poussière, d'objets solides et de l'humidité	29
18 Résistance d'isolement, rigidité diélectrique et courant de fuite	30
19 Construction	30
20 Composants	31
21 Conducteurs internes.....	31
22 Raccordement à l'alimentation et câbles souples externes	31
23 Bornes pour conducteurs externes	31
24 Dispositions en vue de la mise à la terre de protection	31
25 Vis et connexions	31
26 Lignes de fuite, distances d'isolement et distances à travers l'isolation.....	31
27 Résistance à la chaleur, au feu et aux courants de cheminement	32
28 Protection contre la rouille	32
Annexes	33
Bibliographie.....	34
Tableau 101 – Symboles qui indiquent le type de transformateur	27

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

SÉCURITÉ DES TRANSFORMATEURS, BOBINES D'INDUCTANCE, BLOCS D'ALIMENTATION ET COMBINAISONS DE CES ÉLÉMENTS –

Partie 2-2: Exigences particulières et essais pour les transformateurs de commande et les blocs d'alimentation qui incorporent des transformateurs de commande

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments du présent document de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets.

La Norme internationale IEC 61558-2-2 a été établie par le comité d'études 96 de l'IEC: Transformateurs, bobines d'inductance, blocs d'alimentation et combinaisons de ces éléments.

Cette troisième édition annule et remplace la deuxième édition parue en 2007. Cette édition constitue une révision technique.

Cette édition inclut les modifications techniques majeures suivantes par rapport à l'édition précédente:

- a) la structure et les références ont été alignées sur l'IEC 61558-1:2017;
- b) un nouveau symbole général a été ajouté pour les transformateurs de commande;

c) un nouveau symbole a été ajouté pour les blocs d'alimentation dont la régulation de la tension secondaire est linéaire.

Le texte de ce document est issu des documents suivants:

Projet	Rapport de vote
96/548/FDIS	96/554/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à son approbation.

La langue employée pour l'élaboration de ce document est l'anglais.

Ce document a été rédigé selon les Directives ISO/IEC, Partie 2, il a été développé selon les Directives ISO/IEC, Partie 1 et les Directives ISO/IEC, Supplément IEC, disponibles sous www.iec.ch/members_experts/refdocs. Les principaux types de documents développés par l'IEC sont décrits plus en détail sous www.iec.ch/standardsdev/publications.

Il a le statut de publication groupée de sécurité conformément au Guide 104 de l'IEC.

Le présent document doit être utilisé conjointement avec l'IEC 61558-1:2017.

Le présent document complète ou modifie les articles correspondants de l'IEC 61558-1:2017, de façon à transformer cette publication en norme IEC: *Exigences particulières et essais pour les transformateurs de commande et les blocs d'alimentation qui incorporent des transformateurs de commande*.

Une liste de toutes les parties de la série IEC 61558, publiées sous le titre général *Sécurité des transformateurs, bobines d'inductance, blocs d'alimentation et combinaisons de ces éléments*, se trouve sur le site web de l'IEC.

Les futures normes de cette série porteront le nouveau titre général cité ci-dessus. Le titre des normes qui existent déjà dans cette série sera mis à jour lors de la prochaine édition.

Lorsque le présent document mentionne "*addition*", "*modification*" ou "*remplacement*", le texte correspondant de l'IEC 61558-1:2017 doit être adapté en conséquence.

Dans le présent document, les caractères d'imprimerie suivants sont utilisés:

- exigences proprement dites: caractères romains;
- modalités d'essais: *caractères italiques*;
- commentaires: petits caractères romains.

Dans le texte du présent document, les termes en **gras** sont définis à l'Article 3.

Les paragraphes, notes, figures et tableaux qui s'ajoutent à ceux de l'IEC 61558-1:2017 sont numérotés à partir de 101; les annexes qui sont ajoutées sont désignées AA, BB, etc.

Le comité a décidé que le contenu de ce document ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous www.webstore.iec.ch dans les données relatives au document recherché. A cette date, le document sera

- reconduit,
- supprimé,
- remplacé par une édition révisée, ou
- amendé.

INTRODUCTION

Le CE 96 de l'IEC a une fonction groupée de sécurité, conformément au Guide 104 de l'IEC relatif aux transformateurs autres que ceux destinés à alimenter les réseaux de distribution, notamment les transformateurs et les blocs d'alimentation destinés à permettre l'application de mesures de protection contre les chocs électriques, comme cela est défini par le CE 64, mais qui incluent également dans certains cas la limitation de la tension et de la fonction de sécurité horizontale pour la TBTS, conformément à l'IEC 60364-4-41.

La fonction groupée de sécurité (GSF, *Group Safety Function*) est utilisée en raison, par exemple, de la responsabilité de la très basse tension de sécurité (TBTS), conformément au 5.2.6 de l'IEC 61140:2016 et au 414.3.1 de l'IEC 60364-4-41:2005, ou des circuits de commande, conformément au 7.2.4 de l'IEC 60204-1:2016.

La fonction groupée de sécurité est utilisée pour chacune des parties de la série IEC 61558-2, car différentes normes de la série IEC 61558 peuvent être combinées en une seule et même construction, mais dans certains cas sans aucune limitation de la puissance secondaire assignée.

Un autotransformateur conforme à l'IEC 61558-2-13 peut par exemple être conçu avec un circuit TBTS séparé, conformément aux exigences particulières de l'IEC 61558-2-6 liées aux exigences générales de l'IEC 61558-1.

SÉCURITÉ DES TRANSFORMATEURS, BOBINES D'INDUCTANCE, BLOCS D'ALIMENTATION ET COMBINAISONS DE CES ÉLÉMENTS –

Partie 2-2: Exigences particulières et essais pour les transformateurs de commande et les blocs d'alimentation qui incorporent des transformateurs de commande

1 Domaine d'application

Remplacement:

La présente partie de l'IEC 61558 traite de la sécurité des **transformateurs de commande** et des **blocs d'alimentation** qui incorporent des **transformateurs de commande**. Les **transformateurs** qui incorporent des **circuits électroniques** sont également couverts par le présent document.

NOTE 1 La sécurité comprend les aspects électrique, thermique et mécanique.

Sauf spécification contraire dans la suite du présent document, le terme **transformateur** couvre les **transformateurs de commande** et les **blocs d'alimentation** qui incorporent des **transformateurs de commande**.

Pour les **blocs d'alimentation** (linéaires), le présent document s'applique. Pour les **blocs d'alimentation à découpage**, l'IEC 61558-2-16 et le présent document s'appliquent. Lorsque deux exigences sont contradictoires, la plus contraignante prévaut.

Le présent document ne s'applique pas aux **transformateurs** couverts par l'IEC 60076-11.

Le présent document s'applique aux **transformateurs** de **type sec fixes** ou **mobiles**, monophasés ou polyphasés, à refroidissement par air (naturel ou forcé) **indépendants** ou **associés**. Les enroulements peuvent être enrobés ou non enrobés.

La **tension primaire assignée** ne dépasse pas 1 000 V en courant alternatif, et la **fréquence d'alimentation assignée** et les **fréquences de fonctionnement interne** ne dépassent pas 500 Hz.

La **puissance thermique assignée** ne dépasse pas:

- 25 kVA pour les **transformateurs** monophasés;
- 40 kVA pour les **transformateurs** polyphasés.

Le présent document s'applique aux **transformateurs** sans limitation de la **puissance thermique assignée**, qui font l'objet d'un accord entre l'acheteur et le fabricant.

NOTE 2 Le domaine d'application ne couvre pas les **transformateurs** destinés à alimenter les réseaux.

La **tension secondaire à vide** ou la **tension secondaire assignée** ne dépasse pas 1 000 V en courant alternatif ou 1 415 V en courant continu lissé. Pour les **transformateurs indépendants**, la **tension secondaire à vide** et/ou la **tension secondaire assignée** n'est pas inférieure à 50 V en courant alternatif ou 120 V en courant continu lissé.

Le présent document ne s'applique pas aux circuits externes et à leurs composants destinés à être connectés aux bornes primaires et bornes secondaires des **transformateurs**.

NOTE 3 Les **transformateurs** couverts par le présent document ne sont utilisés que dans le cadre d'applications pour lesquelles les règles d'installation ou la norme du produit final n'exigent aucune isolation double ou renforcée entre les circuits.

NOTE 4 Normalement, les **transformateurs de commande** sont destinés à être utilisés avec des équipements dans le but de délivrer des tensions différentes de la tension du réseau afin de satisfaire aux exigences fonctionnelles de l'équipement. La protection contre les chocs électriques peut être procurée ou complétée par d'autres parties de l'équipement, telles que la **masse**. Des parties de **circuits secondaires** peuvent être connectées aux **circuits primaires** ou à la terre de protection.

L'attention est attirée sur les points suivants, si nécessaire:

- exigences supplémentaires (issues d'autres normes applicables, règles nationales, etc.) pour les **transformateurs** destinés à être utilisés dans des véhicules, à bord de navires ou d'avions;
- mesures qui visent à protéger l'**enveloppe** et les composants à l'intérieur de l'enveloppe contre les influences externes, telles que les champignons, la vermine, les termites, le rayonnement solaire et le givre;
- différentes conditions de transport, de stockage et de fonctionnement pour les **transformateurs**;
- exigences supplémentaires qui peuvent s'appliquer aux **transformateurs** destinés à être utilisés dans un environnement particulier, au regard d'autres normes et règles nationales applicables.

Les évolutions techniques futures des **transformateurs** peuvent nécessiter une augmentation de la limite supérieure des fréquences. En attendant, le présent document peut être utilisé à titre de recommandation.

La présente publication groupée de sécurité portant sur des recommandations de sécurité est avant tout destinée à être utilisée en tant que norme en matière de sécurité des produits qui sont cités dans le domaine d'application, mais elle est également destinée à être utilisée par les comités d'études dans le cadre de l'élaboration de publications pour des produits similaires à ceux cités dans le domaine d'application de la présente publication groupée de sécurité, conformément aux principes établis dans le Guide 104 de l'IEC et le Guide 51 de l'ISO/IEC.

L'une des responsabilités d'un comité d'études consiste, le cas échéant, à utiliser les publications fondamentales de sécurité et/ou les publications groupées de sécurité dans le cadre de l'élaboration de ses publications.

2 Références normatives

L'article de l'IEC 61558-1:2017 s'applique, avec les exceptions suivantes:

Addition:

IEC 61558-1:2017, *Sécurité des transformateurs, bobines d'inductance, blocs d'alimentation et des combinaisons de ces éléments – Partie 1: Exigences générales et essais*

IEC 61558-2-16:2021, *Sécurité des transformateurs, bobines d'inductance, blocs d'alimentation et combinaisons de ces éléments – Partie 2-16: Exigences particulières et essais pour les blocs d'alimentation à découpage et les transformateurs pour blocs d'alimentation à découpage pour applications d'ordre général*