

This is a preview - click here to buy the full publication

INTERNATIONAL STANDARD

**ISO/IEC
29157**

First edition
2010-06-15

Information technology — Telecommunications and information exchange between systems — PHY/MAC specifications for short-range wireless low-rate applications in the ISM band —

*Technologies de l'information — Téléinformatique — Spécifications
PHY/MAC pour applications à bas débit sans fil à courte portée dans la
bande ISM —*

WIFI

Reference number
ISO/IEC 29157:2010(E)



© ISO/IEC 2010

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



The word "Withdrawn" is written in a large, bold, red outline font. It is oriented diagonally, sloping upwards from the bottom-left towards the top-right of the page. The letters are thick and have a three-dimensional perspective, giving them a sense of depth as if they are floating in space.

**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland


Contents

Page

| | |
|--|-------------|
| Foreword | viii |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Abbreviated terms | 2 |
| 5 Overview..... | 3 |
| 6 Interlayer service specification..... | 5 |
| 6.1 Overview..... | 5 |
| 6.2 General format of management primitives | 6 |
| 6.2.1 MLME-GET.request and PLME-GET.request | 7 |
| 6.2.2 MLME-GET.confirm and PLME-GET.confirm..... | 7 |
| 6.2.3 MLME-SET.request and PLME-SET.request..... | 8 |
| 6.2.4 MLME-SET.confirm and MLME-SET.confirm | 8 |
| 6.3 MLME-SAP | 9 |
| 6.3.1 MLME-GET.request | 10 |
| 6.3.2 MLME-GET.confirm | 10 |
| 6.3.3 MLME-MASTER-START.request | 10 |
| 6.3.4 MLME-MASTER-START.confirm | 11 |
| 6.3.5 MLME-RESET.request..... | 11 |
| 6.3.6 MLME-RESET.confirm | 12 |
| 6.3.7 MLME-SCAN.request | 12 |
| 6.3.8 MLME-SCAN.confirm | 13 |
| 6.3.9 MLME-SET.request | 13 |
| 6.3.10 MLME-SET.confirm..... | 14 |
| 6.4 MAC-SAP | 14 |
| 6.4.1 MAC-DATA.request | 15 |
| 6.4.2 MAC-DATA.confirm | 15 |
| 6.4.3 MAC-DATA.indication | 16 |
| 6.5 PLME-SAP | 16 |
| 6.5.1 PLME-GET.request | 17 |
| 6.5.2 PLME-GET.confirm | 17 |
| 6.5.3 PLME-SET.request | 18 |
| 6.5.4 PLME-SET.confirm | 18 |
| 6.5.5 PLME-RESET.request | 19 |
| 6.5.6 PLME-RESET.confirm | 19 |
| 6.6 PD-SAP | 19 |
| 6.6.1 PD-DATA.request | 20 |
| 6.6.2 PD-DATA.confirm | 20 |
| 6.6.3 PD-DATA.indication | 21 |
| 7 MAC PDU format..... | 21 |
| 7.1 MPDU of beacon frame (BF) | 22 |
| 7.1.1 Open flag (OF, 2 bits) | 22 |
| 7.1.2 MAC version (6 bits)..... | 22 |
| 7.1.3 Address mode (ADDM, 2 bits)..... | 22 |
| 7.1.4 PHY version (6 bits)..... | 22 |
| 7.1.5 Frame type (8 bits)..... | 22 |
| 7.1.6 Superframe mode control (SFMC, 2 bits)..... | 23 |
| 7.1.7 Upper layer frame size (ULFS, 6 bits)..... | 23 |
| 7.1.8 Source MAC address (64 bits) | 23 |

| | | |
|--------|--|----|
| 7.1.9 | Superframe counter (SFC, 4 bits)..... | 23 |
| 7.1.10 | Middleframe counter (FC, 4 bits)..... | 23 |
| 7.1.11 | Hopping sequence (32 bits)..... | 24 |
| 7.1.12 | BF frequency table (BFFT, 16 bytes) | 24 |
| 7.1.13 | Upper layer data (16 bytes)..... | 24 |
| 7.2 | MPDU of fast beacon frame (FBF)..... | 24 |
| 7.2.1 | Open flag (OF, 2 bits) | 24 |
| 7.2.2 | MAC version (6 bits) | 24 |
| 7.2.3 | Address mode (ADDMM, 2 bits) | 24 |
| 7.2.4 | PHY version (6 bits)..... | 24 |
| 7.2.5 | Frame type (8 bits)..... | 24 |
| 7.2.6 | Superframe mode control (SFMC, 2 bits) | 24 |
| 7.2.7 | Upper layer frame size (ULFS, 6 bits) | 24 |
| 7.2.8 | Source MAC address (64 bits)..... | 25 |
| 7.2.9 | Superframe counter (SFC, 4 bits)..... | 25 |
| 7.2.10 | Middleframe counter (SC, 4 bits)..... | 25 |
| 7.2.11 | Hopping sequence (32 bits)..... | 25 |
| 7.2.12 | BF frequency table (BFFT, 16 bytes) | 25 |
| 7.2.13 | Upper layer data (16 Bytes) | 25 |
| 7.3 | MPDU of request control frame (RCF)..... | 26 |
| 7.3.1 | Open flag (OF, 2 bits) | 26 |
| 7.3.2 | MAC version (6 bits) | 26 |
| 7.3.3 | Address mode (ADDMM, 2 bits) | 26 |
| 7.3.4 | PHY version (6 bits)..... | 26 |
| 7.3.5 | Frame type (8 bits)..... | 26 |
| 7.3.6 | Upper layer frame size (ULFS, 6 bits) | 26 |
| 7.3.7 | Source MAC address (64 bits)..... | 26 |
| 7.3.8 | Destination MAC address (64 bits) | 26 |
| 7.3.9 | Upper layer data..... | 26 |
| 7.4 | MPDU of master control frame (MCF)..... | 27 |
| 7.4.1 | Open flag (OF, 2 bits) | 27 |
| 7.4.2 | MAC version (6 bits) | 27 |
| 7.4.3 | Address mode (ADDMM, 2 bits) | 28 |
| 7.4.4 | PHY version (6 bits)..... | 28 |
| 7.4.5 | Frame type (8 bits)..... | 28 |
| 7.4.6 | Upper layer frame size (ULFS, 6 bits) | 28 |
| 7.4.7 | Source MAC address (64 bits)..... | 28 |
| 7.4.8 | Destination MAC address (64 bits) | 28 |
| 7.4.9 | Upper layer data..... | 29 |
| 7.5 | MPDU of RCF acknowledge control frame (RACF) | 29 |
| 7.6 | MPDU of MCF acknowledge control frame (MACF) | 29 |
| 7.7 | MPDU of payload frame (PF) | 29 |
| 7.7.1 | Open flag (OF, 2 bits) | 29 |
| 7.7.2 | MAC version (6 bits) | 29 |
| 7.7.3 | Address mode (ADDMM, 2 bits) | 29 |
| 7.7.4 | PHY version (6 bits)..... | 29 |
| 7.7.5 | Frame type (8 bits)..... | 29 |
| 7.7.6 | Upper layer frame size (ULFS, 6 bits) | 30 |
| 7.7.7 | Source MAC address (64 bits)..... | 30 |
| 7.7.8 | Destination MAC address (64 bits) | 30 |
| 7.7.9 | Upper layer data..... | 30 |
| 8 | MAC functional description | 31 |
| 8.1 | General description | 31 |
| 8.2 | System state diagram..... | 31 |
| 8.3 | Protocol structure..... | 33 |
| 8.3.1 | Middleframe structure | 34 |
| 8.3.2 | Superframe structure | 34 |
| 8.4 | Frequency operation | 36 |
| 8.4.1 | Frequency hopping control | 36 |

| | | |
|----------|--|-----------|
| 8.4.2 | Frame frequency mapping | 36 |
| 8.4.3 | Frequency diversity and time diversity..... | 37 |
| 8.4.4 | Orthogonal frequency offset..... | 37 |
| 8.4.5 | Frequency selection..... | 37 |
| 9 | PHY specification | 40 |
| 9.1 | General requirements | 40 |
| 9.1.1 | Operating frequency range | 40 |
| 9.1.2 | Frequency assignment | 40 |
| 9.1.3 | Frequency synthesizer stabilisation time | 40 |
| 9.1.4 | Frequency synthesizer turn off time | 41 |
| 9.2 | PHY protocol data unit (PPDU) format | 41 |
| 9.2.1 | Lock time | 41 |
| 9.2.2 | Preamble (128 bits)..... | 41 |
| 9.2.3 | Header (48 bits)..... | 42 |
| 9.2.4 | Message | 42 |
| 9.2.5 | EoF delimiter..... | 42 |
| 9.3 | Modulation and codes..... | 42 |
| 9.3.1 | Modulation | 42 |
| 9.3.2 | Codes..... | 43 |
| 9.4 | Transmitter specification..... | 44 |
| 9.4.1 | Pulse shaping filter | 44 |
| 9.4.2 | Transmitter power spectrum mask..... | 44 |
| | Bibliography..... | 45 |

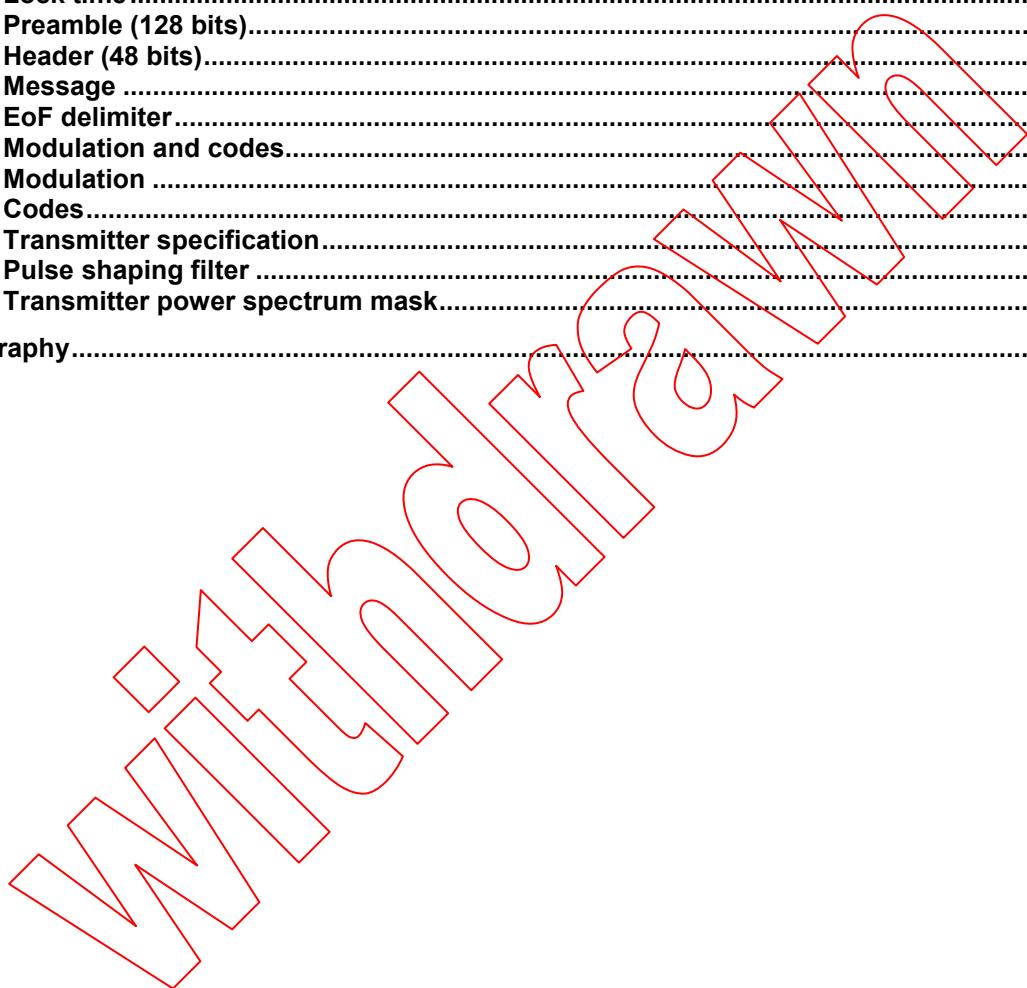

Figures

| | |
|---|----|
| Figure 1 — A group communication example | 4 |
| Figure 2 — Data formats: a frame, a middleframe, and a superframe. | 5 |
| Figure 3 — The protocol model used in this International Standard | 6 |
| Figure 4 — MPDU in Frame structure | 22 |
| Figure 5 — MPDU format of Beacon Frame | 23 |
| Figure 6 — MPDU format of Fast Beacon Frame (FBF)..... | 25 |
| Figure 7 — MPDU format of RCF..... | 27 |
| Figure 8 — MPDU format of MCF | 28 |
| Figure 9 — MPDU format of PF | 30 |
| Figure 10 — A pico-net with only two devices. | 31 |
| Figure 11 — A pico-net with more than two terminals..... | 31 |
| Figure 12 — State transition diagram | 33 |
| Figure 13 — The protocol structure..... | 34 |
| Figure 14 — Middleframe structure | 34 |
| Figure 15 — Structure of a normal superframe | 35 |
| Figure 16 — Structure of a fast synchronisation superframe..... | 35 |
| Figure 17 — Superframe mode alternation | 35 |
| Figure 18 — Middleframe counter | 36 |
| Figure 19 — Superframe counter | 36 |
| Figure 20 — The hopping sequence generator | 36 |
| Figure 21 — Frame frequency mapping scheme..... | 37 |
| Figure 22 — Middleframe structure of passive sounding | 38 |
| Figure 23 — One cycle of passive sounding frames | 38 |
| Figure 24 — Illustration of static sounding..... | 39 |
| Figure 25 — Middleframe structure of static sounding | 39 |
| Figure 26 — Static sounding value | 39 |
| Figure 27 — The structure of the static sounding superframe | 40 |
| Figure 28 — PHY Protocol Data Unit (PPDU) format..... | 41 |
| Figure 29 — An example of Gold code generators | 42 |
| Figure 30 — Scan code | 43 |
| Figure 31 — Security code..... | 43 |
| Figure 32 — Group code | 43 |

Tables

| | |
|---|----|
| Table 1 — General management primitive overview | 6 |
| Table 2 — MLME/PLME general management primitive parameters | 7 |
| Table 3 — MLME primitive summary..... | 9 |
| Table 4 — MLME-SAP parameters | 9 |
| Table 5 — MAC-SAP primitive summary..... | 14 |
| Table 6 — MAC-SAP parameters | 14 |
| Table 7 — PLME-SAP primitive summary..... | 16 |
| Table 8 — PLME-SAP parameters | 17 |
| Table 9 — PD-SAP primitives | 19 |
| Table 10 — PD-SAP parameters | 20 |
| Table 11 — Description of states | 32 |
| Table 12 — The use of the fields in a frame..... | 41 |

Withdrawing

Foreword


ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 29157 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology, Subcommittee SC 6, Telecommunications and information exchange between systems*.

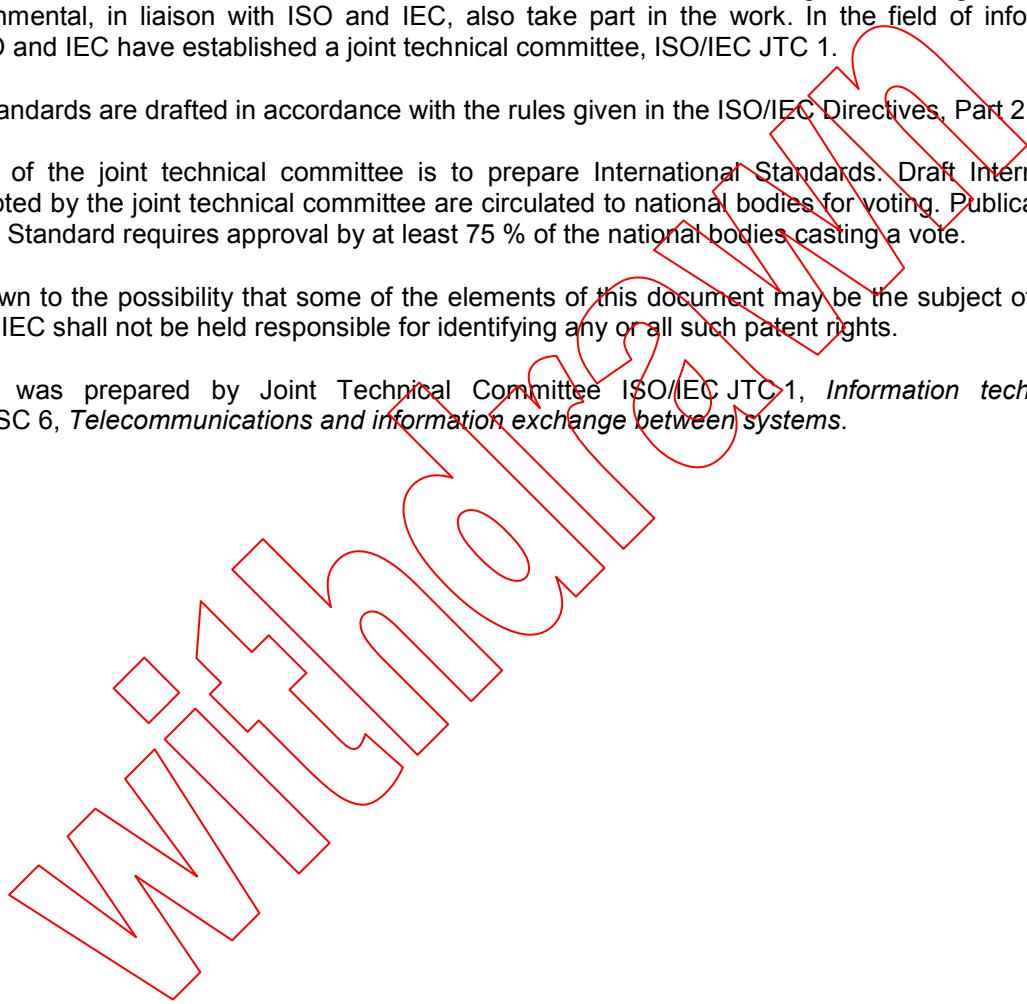

Information technology — Telecommunications and information exchange between systems — PHY/MAC specifications for short-range wireless low-rate applications in the ISM band

1 Scope

This International Standard specifies the PHY characteristics and MAC procedures used for short-range, low-data-rate, wireless communications with very low latency and point-to-multipoint connection capability.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

