

This is a preview - click here to buy the full publication



ISO/IEC 14776-333

Edition 1.0 2013-09

# INTERNATIONAL STANDARD

---

**Information technology – Small Computer System Interface (SCSI) –  
Part 333: SCSI Stream Commands – 3 (SSC-3)**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE **XC**

---

ICS 35.200

ISBN 978-2-8322-1128-1

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD .....	9
INTRODUCTION .....	11
1 Scope .....	12
2 Normative references .....	13
3 Terms, definitions, acronyms, keywords and conventions .....	14
3.1 Terms and definitions.....	14
3.2 Acronyms .....	22
3.3 Keywords .....	22
3.4 Editorial conventions.....	23
3.5 Notation conventions – State diagrams .....	24
4 General concepts .....	26
4.1 Overview .....	26
4.2 Sequential-access device model .....	26
4.2.1 Sequential-access device model overview .....	26
4.2.2 Physical elements.....	26
4.2.3 Removable volumes .....	29
4.2.4 Device entity .....	29
4.2.5 Early-warning.....	32
4.2.6 Programmable early warning.....	32
4.2.7 Partitions within a volume .....	33
4.2.8 Logical objects .....	34
4.2.9 Logical files .....	35
4.2.10 Object buffering .....	35
4.2.11 Synchronize operation behavior .....	36
4.2.12 Direction and position definitions .....	36
4.2.13 Error reporting.....	37
4.2.14 Write protection.....	39
4.2.15 Progress indication .....	41
4.2.16 Tagged command queuing .....	42
4.2.17 Block address mode .....	43
4.2.18 TapeAlert application client interface.....	52
4.2.19 READ ATTRIBUTE and WRITE ATTRIBUTE command support .....	58
4.2.20 Reservations.....	59
4.2.21 WORM volume and WORM mode.....	61
4.2.22 Logical block encryption .....	61
4.2.23 External data encryption control .....	72
4.2.24 Logical block encryption key protection .....	78
4.2.25 Appending data to a volume containing encrypted logical blocks .....	78
4.2.26 Self-test operations.....	79
4.2.27 Capability-based command (CbCS) security.....	79
5 Explicit address command descriptions for sequential-access devices .....	81
5.1 Summary of commands for explicit address mode.....	81
5.2 ERASE(16) command.....	84
5.3 READ(16) command.....	85
5.4 READ REVERSE(16) command.....	89
5.5 VERIFY(16) command.....	90
5.6 WRITE(16) command .....	92
5.7 WRITE FILEMARKS(16) command.....	94
6 Implicit address command descriptions for sequential-access devices .....	96
6.1 Summary of commands for implicit address mode.....	96
6.2 ERASE(6) command.....	99
6.3 LOCATE(10) command .....	100

6.4	READ(6) command.....	101
6.5	READ REVERSE(6) command.....	103
6.6	SPACE(6) command.....	103
6.7	VERIFY(6) command.....	106
6.8	WRITE(6) command.....	107
6.9	WRITE FILEMARKS(6) command.....	108
7	Common command descriptions for sequential-access devices .....	110
7.1	FORMAT MEDIUM command .....	110
7.2	LOAD UNLOAD command .....	111
7.3	LOCATE(16) command .....	113
7.4	PREVENT ALLOW MEDIUM REMOVAL command .....	114
7.5	READ BLOCK LIMITS command .....	115
7.6	READ POSITION command.....	117
7.6.1	READ POSITION command description .....	117
7.6.2	READ POSITION DATA format, short form.....	118
7.6.3	READ POSITION data format, long form .....	120
7.6.4	READ POSITION data format, extended form .....	122
7.7	RECOVER BUFFERED DATA command .....	123
7.8	REPORT DENSITY SUPPORT command.....	124
7.8.1	REPORT DENSITY SUPPORT command description.....	124
7.8.2	REPORT DENSITY SUPPORT header.....	124
7.8.3	Density support report .....	125
7.8.4	Medium type support report.....	127
7.9	REWIND command.....	129
7.10	SET CAPACITY command .....	130
7.11	SPACE(16) command.....	130
8	Parameters for sequential-access devices .....	134
8.1	Diagnostic parameters.....	134
8.2	Log parameters.....	134
8.2.1	Log parameters overview .....	134
8.2.2	Sequential-Access Device log page .....	135
8.2.3	TapeAlert log page .....	137
8.2.4	Device Statistics log page.....	138
8.2.5	Tape Diagnostic Data log page .....	140
8.2.6	Current Service Information log page .....	144
8.2.7	Requested Recovery log page .....	149
8.3	Mode parameters.....	152
8.3.1	Mode parameters overview .....	152
8.3.2	Data Compression mode page .....	155
8.3.3	Device Configuration mode page .....	159
8.3.4	Medium Partition mode page.....	163
8.3.5	Read-Write Error Recovery mode page .....	166
8.3.6	Informational Exceptions Control mode page.....	168
8.3.7	Medium Configuration mode page.....	169
8.3.8	Device Configuration Extension mode page.....	170
8.4	Vital product data (VPD) parameters .....	172
8.4.1	VPD parameters overview and page codes .....	172
8.4.2	Sequential-access Device Capabilities VPD page .....	173
8.4.3	Manufacturer-assigned Serial Number VPD page.....	173
8.4.4	TapeAlert Supported Flags VPD page .....	174
8.4.5	Automation Device Serial Number VPD page .....	174
8.5	Security protocol parameters.....	175
8.5.1	Security protocol overview.....	175
8.5.2	SECURITY PROTOCOL IN command specifying Tape Data Encryption security protocol.....	175

8.5.3 SECURITY PROTOCOL OUT command specifying Tape Data Encryption security protocol.....	190
8.5.4 SECURITY PROTOCOL IN and SECURITY PROTOCOL OUT descriptors .....	201
Annex A (informative) Application client recommendations for using TapeAlert .....	205
Annex B (informative) Security environment .....	211
Annex C (informative) Example keyless copy operation flowchart .....	213
Annex D (informative) Sense logical block information for error conditions .....	215
BIBLIOGRAPHY .....	220

Figure 1 — SCSI document relationships .....	12
Figure 2 — Example state diagram .....	25
Figure 3 — Typical volume layout .....	27
Figure 4 — Typical medium track layout .....	27
Figure 5 — Serpentine recording example .....	28
Figure 6 — Parallel recording example .....	28
Figure 7 — Helical scan recording example .....	28
Figure 8 — UML example of SCSI target device and device entity .....	30
Figure 9 — Early-warning example .....	32
Figure 10 — Programmable early warning example .....	32
Figure 11 — Partitioning example - one partition per track group .....	33
Figure 12 — Partitioning example - one partition per two track groups .....	34
Figure 13 — Partitioning example - two partitions per track group .....	34
Figure 14 — Block address mode state diagram, overview .....	45
Figure 15 — Block address mode state diagram, Idle state .....	46
Figure 16 — Block address mode state diagram, Explicit Address Mode - Neutral .....	48
Figure 17 — Block address mode state diagram, Explicit Address Mode - Write Capable .....	50
Figure 18 — Block address mode state diagram, Implicit Address Mode .....	51
Figure B.1 — Simple security deployment environment .....	211
Figure C.1 — Example keyless copy operation flowchart .....	214

Table 1 — Numbering conventions examples .....	24
Table 2 — Device entity attributes .....	30
Table 3 — Stream commands sense data descriptor .....	37
Table 4 — Information sense data descriptor .....	38
Table 5 — Error conditions and sense keys .....	38
Table 6 — Write protect additional sense code combinations .....	40
Table 7 — Commands providing progress indication without changing ready state.....	41
Table 8 — Commands changing ready state and providing progress indication .....	42
Table 9 — TapeAlert flags severity .....	52
Table 10 — TapeAlert flags .....	53
Table 11 — TapeAlert flag activation conditions.....	57
Table 12 — Device common attributes .....	58
Table 13 — Medium common attributes .....	59
Table 14 — SSC-3 commands that are allowed in the presence of various reservations .....	60
Table 15 — Default I_T_L nexus logical block encryption information .....	69
Table 16 — Logical block encryption parameters for encryption request policies .....	74
Table 17 — Logical block encryption parameters for decryption request policies .....	75
Table 18 — Logical block encryption parameters for encryption request indicator settings .....	76
Table 19 — Logical block encryption parameters for decryption request indicator settings .....	76
Table 20 — Logical block encryption period timer expired indicator.....	77
Table 21 — Association between commands and CbCS permissions .....	79
Table 22 — Explicit address command set for sequential-access devices.....	81
Table 23 — ERASE(16) command .....	84
Table 24 — METHOD field .....	85
Table 25 — READ(16) command .....	86
Table 26 — READ REVERSE(16) command .....	89
Table 27 — VERIFY(16) command .....	90
Table 28 — WRITE(16) command.....	92
Table 29 — WRITE FILEMARKS(16) command .....	94
Table 30 — Implicit address command set for sequential-access devices.....	96
Table 31 — ERASE(6) command .....	99
Table 32 — LOCATE(10) command .....	100
Table 33 — READ(6) command .....	101
Table 34 — READ REVERSE(6) command .....	103
Table 35 — SPACE(6) command .....	104
Table 36 — CODE field.....	104
Table 37 — VERIFY(6) command .....	106
Table 38 — WRITE(6) command.....	107
Table 39 — WRITE FILEMARKS(6) command .....	108
Table 40 — FORMAT MEDIUM command .....	110
Table 41 — FORMAT field .....	111
Table 42 — LOAD UNLOAD command.....	112
Table 43 — LOCATE(16) command .....	113
Table 44 — DEST_TYPE field.....	114
Table 45 — PREVENT ALLOW MEDIUM REMOVAL command.....	114
Table 46 — PREVENT field .....	115
Table 47 — READ BLOCK LIMITS command .....	115
Table 48 — READ BLOCK LIMITS data.....	116
Table 49 — READ POSITION command.....	117
Table 50 — READ POSITION service action codes.....	117
Table 51 — READ POSITION data format, short form .....	118
Table 52 — READ POSITION data format, long form .....	120
Table 53 — READ POSITION data format, extended form .....	122
Table 54 — RECOVER BUFFERED data command.....	123
Table 55 — REPORT DENSITY SUPPORT command.....	124
Table 56 — REPORT DENSITY SUPPORT header .....	124
Table 57 — Density support data block descriptor .....	125
Table 58 — Medium type descriptor .....	128
Table 59 — REWIND command .....	129
Table 60 — SET CAPACITY command.....	130

Table 61 — SPACE(16) command .....	131
Table 62 — Space positioning information .....	132
Table 63 — Diagnostic page codes .....	134
Table 64 — Log page codes .....	134
Table 65 — Parameter codes for Sequential-Access Device log page .....	135
Table 66 — TapeAlert log page .....	137
Table 67 — TapeAlert parameter format .....	137
Table 68 — Device Statistics log page .....	138
Table 69 — Device Statistics log parameter codes .....	138
Table 70 — Device statistics data counter log parameter format .....	139
Table 71 — Medium type log parameter format.....	140
Table 72 — Medium type parameter format .....	140
Table 73 — Tape Diagnostic Data log page .....	141
Table 74 — Tape diagnostic data log parameter format.....	142
Table 75 — Current Service Information log page.....	144
Table 76 — Service information log parameter format .....	144
Table 77 — Service information descriptor.....	145
Table 78 — SERVICE INFORMATION DESCRIPTOR TYPE field.....	145
Table 79 — Vendor-specific service information descriptor.....	145
Table 80 — Device information descriptor .....	146
Table 81 — DEC field.....	146
Table 82 — DEVICE REQUESTED RECOVERY field .....	147
Table 83 — Volume information descriptor.....	147
Table 84 — VIC field .....	147
Table 85 — VICQ field.....	148
Table 86 — TapeAlert flag specific information descriptor.....	149
Table 87 — Requested Recovery log page .....	150
Table 88 — REQUESTED RECOVERY LOG PARAMETER CODES.....	150
Table 89 — Requested recovery log parameter format.....	150
Table 90 — RECOVERY PROCEDURES.....	151
Table 91 — Device-specific parameter .....	152
Table 92 — Buffered modes .....	152
Table 93 — SPEED field .....	153
Table 94 — Sequential-access density codes .....	153
Table 95 — Mode page codes and subpage codes.....	154
Table 96 — Data Compression mode page.....	155
Table 97 — Possible boundaries and resulting sense keys due to data compression .....	156
Table 98 — Compression algorithm identifiers .....	158
Table 99 — Device Configuration mode page .....	159
Table 100 — EOD DEFINED field.....	160
Table 101 — WTRE field .....	161
Table 102 — REWIND ON RESET field .....	162
Table 103 — Medium Partition mode page.....	163
Table 104 — PSUM field.....	164
Table 105 — MEDIUM FORMAT RECOGNITION field.....	165
Table 106 — Read-Write Error Recovery mode page .....	166
Table 107 — Informational Exceptions Control mode page.....	168
Table 108 — TEST bit and TEST FLAG NUMBER field .....	168
Table 109 — Medium Configuration mode page .....	169
Table 110 — WORM MODE LABEL RESTRICTIONS field .....	170
Table 111 — WORM MODE FILEMARKS RESTRICTIONS field .....	170
Table 112 — Device Configuration Extension mode page .....	170
Table 113 — SHORT ERASE MODE field .....	172
Table 114 — Sequential-access device VPD page codes.....	172
Table 115 — Sequential-access Device Capabilities VPD page .....	173
Table 116 — Manufacturer-assigned Serial Number VPD page .....	173
Table 117 — TapeAlert Supported Flags VPD page .....	174
Table 118 — Automation Device Serial Number VPD page.....	174
Table 119 — SECURITY PROTOCOL SPECIFIC field .....	175
Table 120 — Tape Data Encryption In Support page .....	176

Table 121 — Tape Data Encryption Out Support page .....	176
Table 122 — Data Encryption Capabilities page .....	177
Table 123 — EXTDECC field .....	177
Table 124 — CFG_P field .....	178
Table 125 — Logical block encryption algorithm descriptor.....	178
Table 126 — DECRYPT_C field .....	179
Table 127 — ENCRYPT_C field .....	179
Table 128 — AVFCLP field.....	180
Table 129 — NONCE_C field .....	180
Table 130 — DKAD_C field.....	181
Table 131 — EEMC_C field.....	181
Table 132 — RDMC_C field .....	182
Table 133 — Supported Key Formats page.....	182
Table 134 — Data Encryption Management Capabilities page .....	183
Table 135 — Data Encryption Status page.....	184
Table 136 — PARAMETERS CONTROL field .....	185
Table 137 — Next Block Encryption Status page .....	186
Table 138 — COMPRESSION STATUS field .....	187
Table 139 — ENCRYPTION STATUS field.....	187
Table 140 — Random Number page .....	189
Table 141 — Device Service Key Wrapping Public Key page .....	189
Table 142 — PUBLIC KEY TYPE field .....	190
Table 143 — SECURITY PROTOCOL SPECIFIC field .....	190
Table 144 — Set Data Encryption page.....	191
Table 145 — SCOPE field.....	192
Table 146 — CEEM field.....	192
Table 147 — RDMC field .....	193
Table 148 — ENCRYPTION MODE field .....	194
Table 149 — DECRYPTION MODE field .....	195
Table 150 — LOGICAL BLOCK ENCRYPTION KEY FORMAT field.....	196
Table 151 — KEY field format with KEY FORMAT field set to 00h .....	197
Table 152 — KEY field format with KEY FORMAT field set to 01h .....	198
Table 153 — KEY field format with KEY FORMAT field set to 02h .....	198
Table 154 — PARAMETER SET field .....	198
Table 155 — ECIES-HC REQUIREMENTS AND PARAMETERS FOR ECIES-KEM .....	200
Table 156 — ECIES-HC REQUIREMENTS AND PARAMETERS FOR ECIES-DEM .....	200
Table 157 — SA Encapsulation page .....	201
Table 158 — Tape Data Encryption descriptor format.....	201
Table 159 — KEY DESCRIPTOR TYPE field.....	202
Table 160 — AUTHENTICATED field.....	202
Table 161 — Wrapped Key descriptor format.....	203
Table 162 — WRAPPED KEY DESCRIPTOR TYPE field .....	203
Table A.1 — TapeAlert log page parameter codes .....	205
Table B.1 — Security environment threats .....	212
Table D.1 — Sense logical block error indications for read and write operations .....	215
Table D.2 — INFORMATION field and position for read and write operations .....	217
Table D.3 — Summary of length error conditions on read type commands .....	219



# INFORMATION TECHNOLOGY - Small Computer System Interface (SCSI) - Part 333: SCSI Stream Commands - 3 (SSC-3)

## FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14776-333 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

A list of all currently available parts of the ISO/IEC 14776 series, under the general title *Information technology – Small computer system interface (SCSI)*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

For any information concerning Technical Committee T10 (SCSI Storage Interfaces), contact ANSI/INCITS (American National Standards Institute, <http://www.ansi.org/>).

## INTRODUCTION

The SCSI Stream Commands - 3 (SSC-3) standard is divided into eight clauses:

Clause 1 is the scope.

Clause 2 enumerates the normative references that apply to this standard.

Clause 3 describes the definitions, acronyms, keywords, and conventions used in this standard.

Clause 4 describes an overview and model of the sequential-access type device.

Clause 5 describes the explicit address command set for sequential-access type devices.

Clause 6 describes the implicit address command set for sequential-access type devices.

Clause 7 describes the common command set for sequential-access type devices.

Clause 8 describes the parameters for sequential-access type devices.

The annexes provide information to assist with implementation of this standard.

# INFORMATION TECHNOLOGY - Small Computer System Interface (SCSI) - Part 333: SCSI Stream Commands - 3 (SSC-3)


## 1 Scope

This part of ISO/IEC 14776 defines the command set extensions in order to facilitate operation of the sequential-access device type. This part of ISO/IEC 14776, implemented in conjunction with the requirements of the SCSI Architecture Model-4 (SAM-4) standard and the applicable clauses of the SCSI Primary Commands-4 (SPC-4) standard, fully specify the standard command set for the sequential-access device type.

This standard provides the following:

- a) it permits an application client to communicate over a SCSI service delivery subsystem, with a logical unit that declares itself to be a sequential-access device in the PERIPHERAL DEVICE TYPE field of the standard INQUIRY data (see SPC-4);
- b) it defines commands unique to the sequential-access device type; and
- c) it defines commands in order to manage the operation of the sequential-access device type.

Figure 1 shows the relationship of this standard to the other standards and related projects in the SCSI family standards as of the publication of this standard.

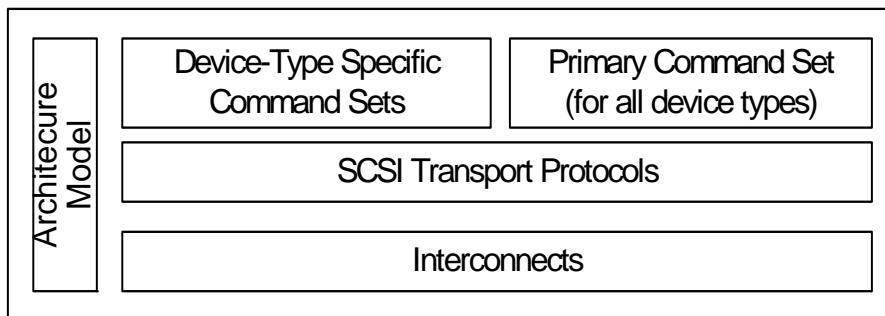

**Figure 1 — SCSI document relationships**

The roadmap in figure 1 is intended to show the general applicability of the documents to one another. The figure is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture. It specifies the applicability of a standard to the implementation of a given SCSI protocol.

This standard makes obsolete the following concepts from previous versions of this standard:

- a) the GAP SIZE field;
- b) RSMK and setmarks; and
- c) Attached Media Changer model.

The term SCSI is used to refer to the family of standards described in this clause.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 14776-414, *Information technology – Small Computer System Interface (SCSI) – Part 414: Architecture model - 4 (SAM-4)*

ISO/IEC 14776-452, *Information technology – Small Computer System Interface (SCSI) – Part 452: Primary Commands - 2 (SPC-2)*

ANSI X9.63:2001, *Public Key Cryptography for the Financial Services Industry – Key Agreement and Key Transport Using Elliptic Curve Cryptography*

ANSI INCITS 382-2004, *Information technology – SCSI Media Changer Commands - 2 (SMC-2)*

ANSI INCITS 513-2004, *Information technology – SCSI Primary Commands - 4 (SPC-4) [T10/1731-D]*

RFC 3447, *Public-Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.1*