

INTERNATIONAL STANDARD

ISO/IEC 14776-412

First edition
2006-10

Information technology – Small computer system interface (SCSI) – Part 412: Architecture model-2 (SAM-2)

Copyright © 2006 ISO/IEC, Geneva — All rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



PRICE CODE

X

For price, see current catalogue

Contents

	Page
1 General.....	11
1.1 Scope	11
1.2 Precedence requirements	11
2 Normative reference	12
3 Definitions, symbols, abbreviations, and conventions	13
3.1 Definitions.....	13
3.2 Acronyms.....	23
3.3 Keywords.....	23
3.4 Editorial conventions	24
3.5 Numeric conventions	25
3.6 Notation conventions	25
3.6.1 Hierarchy diagram conventions.....	25
3.6.2 Notation for procedures and functions.....	26
3.6.3 Notation for state diagrams	27
4 SCSI Architecture Model.....	28
4.1 Introduction.....	28
4.2 The SCSI distributed service model	29
4.3 The SCSI client-server model.....	30
4.4 The SCSI structural model	31
4.5 SCSI domain	33
4.6 The service delivery subsystem	33
4.6.1 The service delivery subsystem object.....	33
4.6.2 Synchronizing client and server states	34
4.6.3 Request/Response ordering.....	34
4.7 SCSI devices	35
4.7.1 SCSI initiator device	35
4.7.2 SCSI target device.....	35
4.7.3 SCSI target/initiator device	37
4.7.4 SCSI port identifier	37
4.7.5 SCSI task router	37
4.7.6 SCSI device name.....	38
4.7.7 SCSI port name	38
4.8 Logical units.....	39
4.9 Logical unit numbers	40
4.9.1 Logical unit numbers overview	40
4.9.2 LUN 0 address.....	40
4.9.3 Single level logical unit number structure	40
4.9.4 Eight byte logical unit number structure	42
4.9.5 Logical unit addressing method.....	44
4.9.6 Peripheral device addressing method	44
4.9.7 Flat space addressing method	45
4.9.8 Extended logical unit addressing.....	45
4.9.9 Well known logical unit addressing.....	47
4.10 Tasks	48
4.10.1 The task object	48
4.10.2 Task tags	48
4.11 The nexus object	49
4.12 SCSI ports	50
4.12.1 SCSI port configurations.....	50
4.12.2 SCSI devices with multiple ports	50
4.12.3 Multiple port target SCSI device structure	51
4.12.4 Multiple port initiator SCSI device structure.....	52
4.12.5 Multiple port target/initiator SCSI device structure	53

4.12.6 SCSI initiator device view of a multiple port SCSI target device	53
4.12.7 SCSI target device view of a multiple port SCSI initiator device	55
4.13 Model for dependent logical units	56
4.14 The SCSI model for distributed communications	58
5 SCSI Command Model	61
5.1 The Execute Command remote procedure	61
5.2 Command descriptor block (CDB)	62
5.2.1 CDB format	62
5.2.2 OPERATION CODE byte	63
5.2.3 CONTROL byte	64
5.3 Status	65
5.3.1 Status codes	65
5.3.2 Status precedence	66
5.4 SCSI transport protocol services in support of Execute Command	67
5.4.1 Overview	67
5.4.2 Execute Command request/confirmation SCSI transport protocol services	67
5.4.3 Data transfer SCSI transport protocol services	69
5.4.3.1 Introduction	69
5.4.3.2 Data-In delivery service	70
5.4.3.3 Data-Out delivery service	70
5.5 Task and command lifetimes	71
5.6 Task management function lifetime	72
5.7 Aborting tasks	72
5.7.1 Mechanisms that cause tasks to be aborted	72
5.7.2 When a SCSI initiator port aborts its own tasks	72
5.7.3 When a SCSI initiator port aborts tasks from other SCSI initiator ports	73
5.8 Command processing examples	73
5.8.1 Unlinked command example	73
5.8.2 Linked command example	74
5.9 Command processing considerations and exception conditions	75
5.9.1 Contingent allegiance (CA) and auto contingent allegiance (ACA)	75
5.9.1.1 Overview	75
5.9.1.2 Establishing a CA or ACA	75
5.9.1.3 Handling tasks when neither CA or ACA is in effect	77
5.9.1.4 Handling new tasks from the faulted initiator port when CA or ACA is in effect	77
5.9.1.5 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect	78
5.9.1.5.1 Commands permitted from non-faulted initiator ports during CA or ACA	78
5.9.1.5.2 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect	79
5.9.1.6 Clearing a CA condition	81
5.9.1.7 Clearing an ACA condition	81
5.9.2 Overlapped commands	81
5.9.3 Incorrect logical unit selection	82
5.9.4 Sense data	82
5.9.4.1 Sense data introduction	82
5.9.4.2 Asynchronous event reporting	83
5.9.4.3 Autosense	83
5.9.5 Unit Attention condition	84
5.9.6 Hard reset	85
5.9.7 Logical unit reset	85
6 Task management functions	86
6.1 Introduction	86
6.2 ABORT TASK	87
6.3 ABORT TASK SET	87
6.4 CLEAR ACA	88
6.5 CLEAR TASK SET	88
6.6 LOGICAL UNIT RESET	89
6.7 TARGET RESET	89
6.8 WAKEUP	89

6.9 Task management SCSI transport protocol services	90
6.10 Task management function example.....	91
7 Task Set Management.....	92
7.1 Introduction to task set management	92
7.2 Controlling task set management.....	92
7.3 Task management events	93
7.4 Task states	93
7.4.1 Overview.....	93
7.4.1.1 Task state nomenclature	93
7.4.1.2 Suspended information.....	93
7.4.2 Enabled task state	93
7.4.3 Blocked task state	94
7.4.4 Dormant task state	94
7.4.5 Ended task state.....	94
7.4.6 Task states and task lifetimes	94
7.5 Task attributes	95
7.5.1 Simple task.....	95
7.5.2 Ordered task.....	95
7.5.3 Head of queue task	95
7.5.4 ACA task.....	95
7.6 Task state transitions.....	96
7.7 Task set management examples.....	97
7.7.1 Introduction.....	97
7.7.2 Head of queue tasks.....	98
7.7.3 Ordered tasks.....	99
7.7.4 ACA task.....	100
Annex A (informative)	
Identifiers and names for objects	101
A.1 Identifiers and names overview.....	101
A.2 Identifiers and names.....	101
A.3 SCSI transport protocol acronyms and bibliography.....	103
Annex B (informative)	
Terminology mapping	105
Bibliography	106

Tables

1 Single level logical unit number structure for 256 or fewer logical units.....	40
2 Single level logical unit number structure for 257 to 16 384 logical units.....	41
3 Eight byte logical unit number structure adjustments	42
4 Eight Byte logical unit number structure	43
5 Format of addressing fields.....	43
6 ADDRESS METHOD field values.....	43
7 Logical unit addressing	44
8 Peripheral device addressing.....	44
9 Flat space addressing.....	45
10 Extended logical unit addressing	46
11 LENGTH field values	46
12 Two byte extended logical unit addressing format.....	46
13 Four byte extended logical unit addressing format	46
14 Six byte extended logical unit addressing format.....	46
15 Eight byte extended logical unit addressing format	46
16 Logical unit extended address methods	47
17 Well known logical unit extended address format.....	47
18 Mapping nexus to SAM-2 identifiers	49
19 Command Descriptor Block (CDB) Format.....	63
20 OPERATION CODE byte	63
21 Group Code values	63
22 CONTROL byte	64
23 Status codes	65
24 Autosense, CA, and ACA Interactions	75
25 Blocking and aborting tasks when a CA or ACA is established	76
26 Task handling when neither CA nor ACA is in effect	77
27 Handling for new tasks from a faulted initiator port during CA.....	77
28 Handling for new tasks from a faulted initiator port during ACA.....	78
29 Handling for new tasks from non-faulted initiator ports during CA.....	79
30 Handling for new tasks from non-faulted initiator ports during ACA.....	80
31 Task Management Functions.....	86
32 Task State Nomenclature	93
33 Task attribute and state indications in examples	97
34 Dormant task blocking boundary requirements	99
A.1 Object size and support requirements.....	101
A.2 Object identifier size for each SCSI transport protocol.....	102
A.3 Object identifier format for each SCSI transport protocol.....	102
A.4 Object name size for each SCSI transport protocol	103
A.5 Object name format for each SCSI transport protocol.....	103
B.1 SAM-2 to SAM terminology mapping	105

Figures

	Page
0 SCSI document structure	9
1 Requirements precedence	11
2 Example hierarchy diagram	25
3 Example state diagram	27
4 Client-Server model	29
5 SCSI client-server model	30
6 SCSI I/O system and domain model	31
7 Overall SCSI domain model	32
8 SCSI domain model	33
9 Service delivery subsystem model	33
10 SCSI initiator device model	35
11 SCSI target device model	36
12 SCSI target/initiator device model	37
13 Logical unit model	39
14 Eight Byte logical unit number structure adjustments	42
15 SCSI device functional models	50
16 Multiple port target SCSI device structure model	51
17 Multiple port SCSI initiator device structure model	52
18 Multiple port target/initiator SCSI device structure model	53
19 SCSI target device configured in a single SCSI domain	54
20 SCSI target device configured in multiple SCSI domains	54
21 SCSI target device and SCSI initiator device configured in a single SCSI domain	55
22 Dependent logical unit model	56
23 Example of hierarchical system diagram	57
24 Protocol service reference model	58
25 Protocol service model	59
26 Request-Response ULP transaction and related LLP services	60
27 Model for Data-In and Data-Out data transfers	69
28 Command processing events	73
29 Linked command processing events	74
30 Task management processing events	91
31 Example of Dormant state task behavior	94
32 Task states	96
33 Head of queue tasks and blocking boundaries (example 1)	98
34 Head of queue tasks and blocking boundaries (example 2)	98
35 Ordered tasks and blocking boundaries	99
36 ACA task example	100

INFORMATION TECHNOLOGY - SMALL COMPUTER SYSTEM INTERFACE (SCSI) -

Part 412: Architecture Model - 2 (SAM-2)

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC Publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC Publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC Publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC Publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon this ISO/IEC publication or any other IEC or ISO publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14776-412 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the title page.

INTRODUCTION

General

The set of SCSI standards consists of this International Standard and the SCSI implementation standards (see SCSI standards family).

The set of SCSI standards specifies the interfaces, functions and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

SCSI standards family

Figure 1 shows the relationship of this standard to the other standards and related projects in the SCSI family standards.

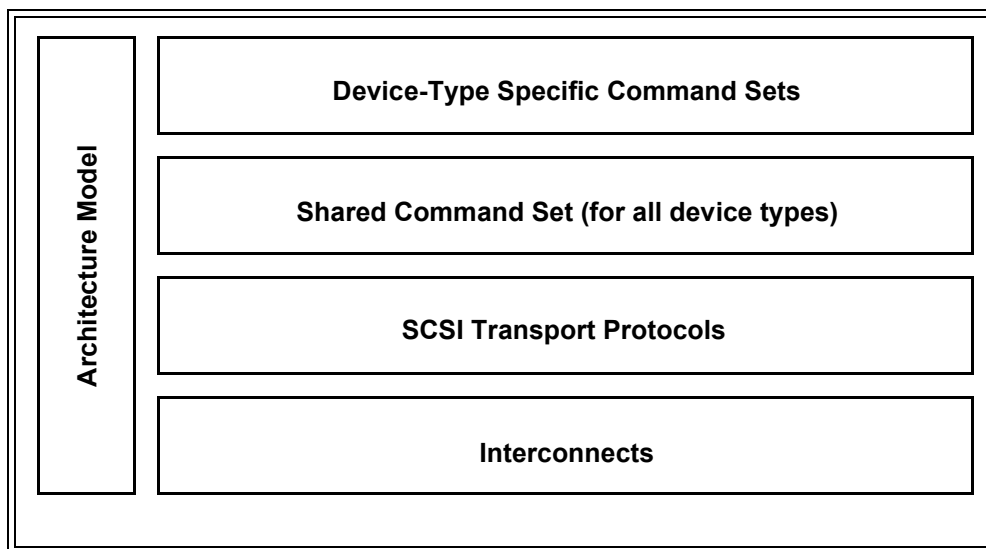


Figure 0 — SCSI document structure

Figure 0 shows the general applicability of the documents with respect to one another. Figure 0 does not imply a relationship such as a hierarchy, protocol stack or system architecture.

The functional areas identified in Figure 0 characterize the scope of standards within a group as follows:

Architecture Model: Defines the SCSI systems model, the functional partitioning of the SCSI standard set and requirements applicable to all SCSI implementations and implementation standards.

Device-Type Specific Command Sets: Implementation standards that define specific device types including a device model for each device type. These standards specify the required commands and behaviour that is specific to a given device type and prescribe the requirements to be followed by a SCSI initiator device when sending commands to a SCSI target device having the specific device type. The commands and behaviours for a specific device type may include reference commands and behaviours that are shared by all SCSI devices.

Shared Command Set: An implementation standard that defines a model for all SCSI device types. This standard specifies the required commands and behaviour that is common to all SCSI devices, regardless of device type, and prescribes the requirements to be followed by a SCSI initiator device when sending commands to any SCSI target device.

SCSI Transport Protocols: Implementation standards that define the requirements for exchanging information so that different SCSI devices are capable of communicating.

Interconnects: Implementation standards that define the communications mechanism employed by the SCSI transport protocols. These standards may describe the electrical and signaling requirements essential for SCSI devices to interoperate over a given interconnect.

For references, see bibliography.

The SCSI Architecture Model-2 (SAM-2) standard is divided into seven clauses and two annexes:

Clause 1	Scope
Clause 2	Normative references
Clause 3	Definitions, symbols and abbreviations
Clause 4	SCSI architecture model
Clause 5	SCSI command model of the SCSI architecture
Clause 6	Task management functions common to SCSI devices
Clause 7	Task set management capabilities common to SCSI devices
Annex A	Identifier and name definitions of the SCSI transport protocols
Annex B	Terminology mapping
Bibliography	

INFORMATION TECHNOLOGY - SMALL COMPUTER SYSTEM INTERFACE (SCSI) -

Part 412: Architecture Model - 2 (SAM-2)

1 General

1.1 Scope

This part of ISO/IEC 14776 defines a reference model that specifies common behaviours for SCSI devices and an abstract structure that is generic to all SCSI I/O system implementations.

This International Standard specifies generic requirements that pertain to SCSI implementation standards and implementation requirements.

1.2 Precedence requirements

An implementation requirement specifies behaviour in terms of measurable or observable parameters that apply to an implementation. Examples of implementation requirements defined in this International Standard are the command descriptor block format and the status values to be returned upon command completion.

Generic requirements are transformed to implementation requirements by an implementation standard. An example of a generic requirement is the hard reset behaviour specified in 5.9.6.

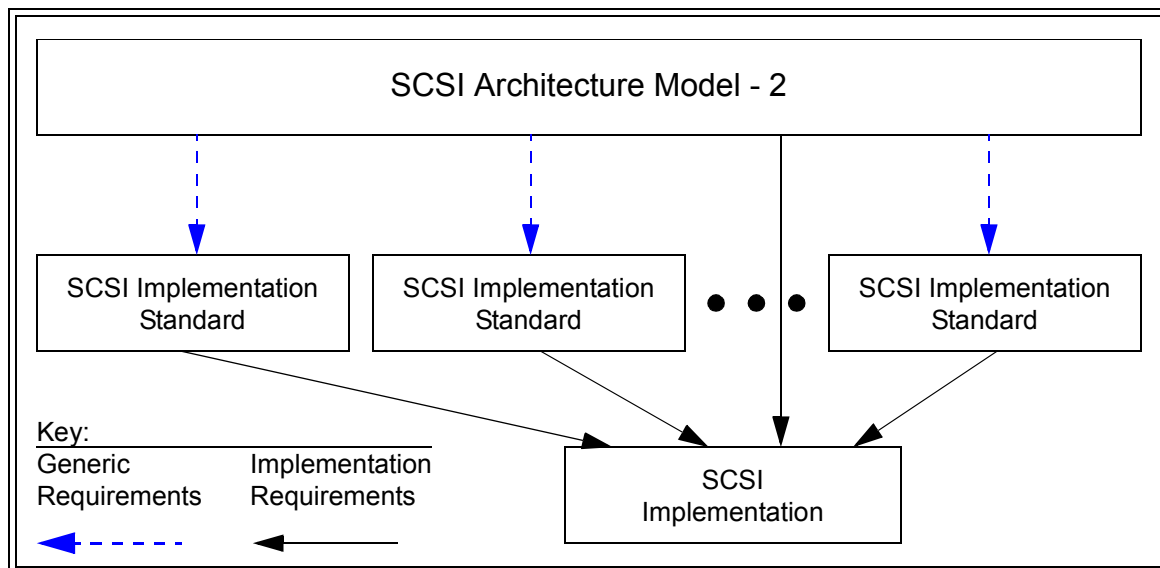


Figure 1 — Requirements precedence

As shown in figure 1, all SCSI implementation standards shall reflect the generic requirements defined herein. In addition, an implementation claiming SCSI compliance shall conform to the applicable implementation requirements defined in this standard and the appropriate SCSI implementation standards. In the event of a conflict between this document and other SCSI standards under the jurisdiction of ISO/IEC JTC 1/SC 25, the requirements of this standard shall apply.

2 Normative reference

The following referenced document is indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 14776-452, *Information technology – Small Computer System Interface (SCSI) – Part 452: Primary Commands-2 (SPC-2)*

For all other references, see bibliography.