

This is a preview - [click here to buy the full publication](#)



ISO/IEC 14776-414

Edition 1.0 2009-06

INTERNATIONAL STANDARD

**Information technology –
Small computer system interface (SCSI) –
Part 414: Architecture model-4 (SAM-4)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XB**

ICS 35.200

ISBN 978-2-88910-829-9

Contents

	Page
FOREWORD.....	10
INTRODUCTION.....	11
General	11
SCSI standards family.....	11
1 Scope.....	12
2 Normative references.....	13
3 Terms, definitions, symbols, abbreviations, and conventions.....	13
3.1 Terms and definitions	13
3.2 Acronyms.....	25
3.3 Keywords.....	25
3.4 Editorial conventions	26
3.5 Numeric conventions	27
3.6 Notation conventions	28
3.6.1 UML notation conventions	28
3.6.1.1 Notation conventions overview.....	28
3.6.1.2 Constraint and note conventions.....	28
3.6.1.3 Class diagram conventions	29
3.6.1.4 Object diagram conventions.....	33
3.6.2 Notation for procedure calls	34
3.6.3 Notation for state diagrams.....	34
4 SCSI architecture model	36
4.1 Introduction.....	36
4.2 Compliance Requirements	36
4.3 The SCSI distributed service model	37
4.4 The SCSI client-server model.....	38
4.4.1 SCSI client-server model overview	38
4.4.2 Synchronizing client and server states	39
4.4.3 Request/Response ordering	39
4.5 The SCSI structural model	39
4.6 SCSI classes	41
4.6.1 SCSI classes overview	41
4.6.2 SCSI Domain class	41
4.6.3 Service Delivery Subsystem class	42
4.6.4 SCSI Device class	43
4.6.4.1 SCSI Device class overview.....	43
4.6.4.2 SCSI Device Name attribute	43
4.6.5 SCSI Port class.....	44
4.6.5.1 SCSI Port class overview	44
4.6.5.2 Relative Port Identifier attribute	45
4.6.6 SCSI Target Port class	45
4.6.6.1 SCSI Target Port class overview.....	45
4.6.6.2 Target Port Identifier attribute.....	45
4.6.6.3 Target Port Name attribute.....	45
4.6.7 SCSI Initiator Port class.....	46
4.6.7.1 SCSI Initiator Port class overview	46
4.6.7.2 Initiator Port Identifier attribute	46
4.6.7.3 Initiator Port Name attribute	46
4.6.8 Task Router class	46
4.6.9 SCSI Initiator Device class.....	47
4.6.10 Application Client class	47
4.6.11 Application Client Task Management Function class	48
4.6.11.1 Application Client Task Management Function class overview.....	48
4.6.11.2 Function Identifier attribute.....	48
4.6.11.3 Nexus attribute	48
4.6.11.4 Service Response attribute	48

4.6.11.5 Additional Response Information attribute	48
4.6.12 Application Client Task Set class	48
4.6.13 Application Client Command class	49
4.6.13.1 Application Client Command class overview	49
4.6.13.2 I_T_L_Q Nexus attribute	49
4.6.13.3 CDB attribute	49
4.6.13.4 Task Attribute attribute	49
4.6.13.5 Status attribute	49
4.6.13.6 Service Response attribute	49
4.6.13.7 Data-In Buffer attribute	49
4.6.13.8 Data-In Buffer Size attribute	49
4.6.13.9 Data-Out Buffer attribute	49
4.6.13.10 Data-Out Buffer size attribute	49
4.6.13.11 CRN attribute	49
4.6.13.12 Command Priority attribute	50
4.6.13.13 First Burst Enabled attribute	50
4.6.13.14 Sense Data attribute	50
4.6.13.15 Sense Data Length attribute	50
4.6.13.16 Status Qualifier attribute	50
4.6.14 SCSI Target Device class	50
4.6.15 Level 1 Hierarchical Logical Unit class	51
4.6.16 Level 2 Hierarchical Logical Unit class	52
4.6.17 Level 3 Hierarchical Logical Unit class	52
4.6.18 Level 4 Hierarchical Logical Unit class	53
4.6.19 Logical Unit class	53
4.6.19.1 Logical Unit class overview	53
4.6.19.2 LUN attribute	55
4.6.19.3 Logical Unit Name attribute	55
4.6.19.4 Dependent Logical Unit attribute	55
4.6.20 Device Server class	56
4.6.21 Task Manager class	56
4.6.22 Task Set class	56
4.6.23 Command class	56
4.6.23.1 Command class overview	56
4.6.23.2 I_T_L_Q Nexus attribute	56
4.6.23.3 Task Attribute attribute	56
4.6.23.4 CDB attribute	57
4.6.23.5 CRN attribute	57
4.6.23.6 Command Priority attribute	57
4.6.23.7 Status attribute	57
4.6.23.8 Sense Data attribute	57
4.6.23.9 Sense Data Length attribute	57
4.6.23.10 Service Response attribute	57
4.6.23.11 Status Qualifier attribute	57
4.6.23.12 First Burst Enabled attribute	57
4.6.23.13 Device Server Buffer attribute	57
4.6.23.14 Application Client Buffer Offset attribute	57
4.6.23.15 Request Byte Count attribute	57
4.6.23.16 Delivery Result attribute	58
4.6.24 Task Management Function class	58
4.6.24.1 Task Management Function class overview	58
4.6.24.2 Function Identifier attribute	58
4.6.24.3 Nexus attribute	58
4.6.24.4 Service Response attribute	58
4.6.24.5 Additional Response Information attribute	58
4.6.25 Well Known Logical Unit class	58
4.7 Logical unit number (LUN)	59
4.7.1 Introduction	59

4.7.2 Logical unit representation format.....	59
4.7.3 LUNs overview.....	59
4.7.4 Minimum LUN addressing requirements.....	59
4.7.5 Single level LUN structure	60
4.7.6 Eight byte LUN structure.....	62
4.7.7 Peripheral device addressing method.....	64
4.7.8 Flat space addressing method.....	65
4.7.9 Logical unit addressing method	66
4.7.10 Extended logical unit addressing	67
4.7.11 Well known logical unit addressing	70
4.7.12 Extended flat space addressing method.....	70
4.7.13 Logical unit not specified addressing	71
4.8 Nexus	71
4.8.1 Nexus overview.....	71
4.8.2 Command identifier.....	72
4.8.3 Nexus usage rules	72
4.9 SCSI ports	72
4.9.1 SCSI port configurations.....	72
4.9.2 SCSI devices with multiple ports.....	73
4.9.3 Multiple port SCSI target device structure	74
4.9.4 Multiple port SCSI initiator device structure	75
4.9.5 Multiple port SCSI device structure.....	76
4.9.6 SCSI initiator device view of a multiple port SCSI target device.....	77
4.9.7 SCSI target device view of a multiple port SCSI initiator device.....	79
4.10 The SCSI model for distributed communications	79
5 SCSI command model	84
5.1 The Execute Command procedure call	84
5.2 Command descriptor block (CDB).....	85
5.3 Status	86
5.3.1 Status codes	86
5.3.2 Status qualifier	87
5.3.3 Status precedence	89
5.4 SCSI transport protocol services in support of Execute Command.....	90
5.4.1 Overview	90
5.4.2 Command and status SCSI transport protocol services	90
5.4.2.1 Command and status SCSI transport protocol services overview	90
5.4.2.2 Send SCSI Command SCSI transport protocol service request	91
5.4.2.3 SCSI Command Received SCSI transport protocol service indication	91
5.4.2.4 Send Command Complete SCSI transport protocol service response	92
5.4.2.5 Command Complete Received SCSI transport protocol service confirmation	92
5.4.3 Data transfer SCSI transport protocol services.....	93
5.4.3.1 Introduction.....	93
5.4.3.2 Data-In delivery service.....	95
5.4.3.2.1 Send Data-In SCSI transport protocol service request.....	95
5.4.3.2.2 Data-In Delivered SCSI transport protocol service confirmation	95
5.4.3.3 Data-Out delivery service	95
5.4.3.3.1 Receive Data-Out SCSI transport protocol service request	95
5.4.3.3.2 Data-Out Received SCSI transport protocol service confirmation.....	96
5.4.3.4 Terminate Data Transfer service.....	96
5.4.3.4.1 Terminate Data Transfer SCSI transport protocol service request.....	96
5.4.3.4.2 Data Transfer Terminated SCSI transport protocol service confirmation	97
5.5 Command lifetimes.....	97
5.6 Aborting commands.....	98
5.7 Command processing example	103
5.8 Commands that complete with CHECK CONDITION status.....	103
5.8.1 Overview	103
5.8.2 Handling commands when ACA is not in effect.....	104
5.8.3 Aborting commands terminated with a CHECK CONDITION status without establishing an ACA	104

5.9 Auto contingent allegiance (ACA).....	105
5.9.1 ACA overview	105
5.9.2 Establishing an ACA	105
5.9.3 Handling new commands received on the faulted I_T nexus when ACA is in effect	106
5.9.4 Handling new commands received on non-faulted I_T nexuses when ACA is in effect	107
5.9.4.1 Command processing permitted for commands received on non-faulted I_T nexuses during ACA	107
5.9.4.2 Handling new commands received on non-faulted I_T nexuses when ACA is in effect.....	107
5.9.5 Clearing an ACA condition	108
5.10 Overlapped commands	109
5.11 Incorrect logical unit.....	109
5.12 Task attribute exception conditions	109
5.13 Sense data	110
5.14 Unit attention condition	110
6 SCSI events and event notification model	114
6.1 SCSI events overview	114
6.2 Establishing a unit attention condition subsequent to detection of an event	116
6.3 Conditions resulting from SCSI events.....	117
6.3.1 Power on.....	117
6.3.2 Hard reset	118
6.3.3 Logical unit reset.....	118
6.3.4 I_T nexus loss.....	118
6.3.5 Power loss expected.....	119
6.4 Event notification SCSI transport protocol services.....	119
7 Task management functions	121
7.1 Task management function procedure calls.....	121
7.2 ABORT TASK.....	122
7.3 ABORT TASK SET	123
7.4 CLEAR ACA	123
7.5 CLEAR TASK SET	123
7.6 I_T NEXUS RESET	124
7.7 LOGICAL UNIT RESET.....	124
7.8 QUERY TASK	124
7.9 QUERY TASK SET	125
7.10 QUERY ASYNCHRONOUS EVENT	125
7.11 Task management function lifetime.....	126
7.12 Task management SCSI transport protocol services	127
7.12.1 Task management SCSI transport protocol services overview	127
7.12.2 Send Task Management Request SCSI transport protocol service request.....	127
7.12.3 Task Management Request Received SCSI transport protocol service indication.....	128
7.12.4 Task Management Function Executed SCSI transport protocol service response.....	128
7.12.5 Received Task Management Function Executed SCSI transport protocol service confirmation ..	129
7.13 Task management function example.....	130
8 Task set management.....	131
8.1 Introduction to task set management	131
8.2 Implicit head of queue	131
8.3 Command management model	131
8.4 Command management events	132
8.5 Command states	132
8.5.1 Overview	132
8.5.1.1 Command state nomenclature	132
8.5.1.2 Suspended information	133
8.5.2 Enabled command state	133
8.5.3 Blocked command state.....	133
8.5.4 Dormant command state.....	133
8.5.5 Completed command state	133
8.5.6 Command states and command lifetimes.....	133
8.6 Task attributes.....	134

8.6.1 Overview	134
8.6.2 Commands having the SIMPLE task attribute	134
8.6.3 Commands having the ORDERED task attribute	135
8.6.4 Commands having the HEAD OF QUEUE task attribute	135
8.6.5 Commands having the ACA task attribute	135
8.7 Command priority	135
8.8 Command state transitions	136
8.9 Task set management examples	137
8.9.1 Introduction	137
8.9.2 Commands having the HEAD OF QUEUE task attribute	138
8.9.3 Commands having the ORDERED task attribute	140
8.9.4 Commands having the ACA task attribute	141
Annex A (informative) Identifiers and names for objects	142
A.1 Identifiers and names overview	142
A.2 Identifiers and names	142
Annex B (informative) SCSI Initiator Port attributes and SCSI Target Port attributes supported by SCSI transport protocols	147
Annex C (informative) Terminology mapping to SAM-3	149
Annex D (informative) SCSI transport protocol acronyms	150
Bibliography	151

Table 1 — Numbering conventions.....	28
Table 2 — Constraint and note notation	28
Table 3 — Class diagram notation for classes.....	29
Table 4 — Multiplicity notation	30
Table 5 — Class diagram notation for associations.....	30
Table 6 — Class diagram notation for aggregations.....	31
Table 7 — Class diagram notation for generalizations	32
Table 8 — Class diagram notation for dependency.....	32
Table 9 — Object diagram notation for objects.....	33
Table 10 — Object diagram notation for link.....	33
Table 11 — Single level LUN structure using peripheral device addressing method	60
Table 12 — Single level LUN structure using flat space addressing method	60
Table 13 — Single level LUN structure using extended flat space addressing method.....	61
Table 14 — Eight byte LUN structure adjustments	62
Table 15 — Eight byte LUN structure	63
Table 16 — Format of addressing fields	63
Table 17 — ADDRESS METHOD field.....	64
Table 18 — Peripheral device addressing format.....	64
Table 19 — Flat space addressing format	66
Table 20 — Logical unit addressing format.....	66
Table 21 — Extended logical unit addressing format.....	68
Table 22 — LENGTH field and related sizes	68
Table 23 — Two byte extended logical unit addressing format	68
Table 24 — Four byte extended logical unit addressing format.....	69
Table 25 — Six byte extended logical unit addressing format	69
Table 26 — Eight byte extended logical unit addressing format.....	69
Table 27 — Logical unit extended addressing	70
Table 28 — Well known logical unit extended addressing format.....	70
Table 29 — Extended flat space addressing format	71
Table 30 — Logical unit not specified extended addressing format.....	71
Table 31 — Nexus	72
Table 32 — CONTROL byte.....	86
Table 33 — Status codes.....	86
Table 34 — Status qualifier format.....	87
Table 35 — SCOPE field.....	88
Table 36 — QUALIFIER field.....	89
Table 37 — SCSI device conditions that abort commands in a SCSI initiator device.....	98
Table 38 — SCSI device conditions that abort commands in a SCSI target device	99
Table 39 — Task management functions that abort commands.....	100
Table 40 — Command related conditions that abort commands	101
Table 41 — Command handling when ACA is not in effect	104
Table 42 — Aborting commands when an ACA is not established.....	104
Table 43 — Blocking and aborting commands when an ACA is established.....	106
Table 44 — Handling for new commands received on a faulted I_T nexus during ACA	107
Table 45 — Handling for new commands received on non-faulted I_T nexuses during ACA	108
Table 46 — Unit attention condition precedence level.....	111
Table 47 — Unit attention additional sense codes for events detected by SCSI target devices.....	117
Table 48 — Task Management Functions	121
Table 49 — Additional Response Information argument for QUERY ASYNCHRONOUS EVENT.....	126
Table 50 — UADE DEPTH field	126
Table 51 — Command management events that cause changes in command state.....	132
Table 52 — Command state nomenclature	132
Table 53 — Task attributes	134
Table 54 — Command priority	135
Table 55 — Task attribute and state indications in examples.....	137
Table 56 — Dormant command blocking boundary requirements.....	140
Table A.1 — Identifier attribute size and support requirements.....	142

Table A.2 — Name attribute size and support requirements	143
Table A.3 — Identifier attribute size for each SCSI transport protocol.....	143
Table A.4 — Identifier attribute format for each SCSI transport protocol.....	144
Table A.5 — Name attribute size for each SCSI transport protocol.....	145
Table A.6 — Name attribute format for each SCSI transport protocol.....	146
Table B.1 — SCSI Initiator Port attributes and SCSI Target Port attributes supported by SCSI transport protocols.....	148
Table C.1 — Terminology mapping to SAM-3	149

Figure 1 — SCSI standard structure	11
Figure 2 — Examples of association relationships in class diagrams.....	31
Figure 3 — Examples of aggregation relationships in class diagrams.....	31
Figure 4 — Example of generalization relationships in class diagrams.....	32
Figure 5 — Example of a dependency relationship in class diagrams.....	33
Figure 6 — Examples of link relationships for object diagrams	34
Figure 7 — Example state diagram.....	35
Figure 8 — Requirements precedence	37
Figure 9 — Client-server model	37
Figure 10 — SCSI client-server model.....	38
Figure 11 — SCSI I/O system and domain model	40
Figure 12 — SCSI Domain class diagram overview	41
Figure 13 — SCSI Domain class diagram	42
Figure 14 — SCSI domain object diagram.....	42
Figure 15 — SCSI Device class diagram.....	43
Figure 16 — SCSI Port class diagram	44
Figure 17 — SCSI Initiator Device class diagram	47
Figure 18 — SCSI Target Device class diagram	50
Figure 19 — Level 1 Hierarchical Logical Unit class.....	51
Figure 20 — Logical Unit class diagram	54
Figure 21 — Eight byte LUN structure adjustments.....	62
Figure 22 — Logical unit selection using the peripheral device addressing format	65
Figure 23 — Logical unit selection using the logical unit addressing format.....	67
Figure 24 — SCSI device functional models.....	73
Figure 25 — Multiple port target SCSI device structure model	74
Figure 26 — Multiple port SCSI initiator device structure model.....	75
Figure 27 — Multiple port SCSI device structure model	76
Figure 28 — SCSI target device configured in a single SCSI domain	77
Figure 29 — SCSI target device configured in multiple SCSI domains	78
Figure 30 — SCSI target device and SCSI initiator device configured in a single SCSI domain.....	78
Figure 31 — Protocol service reference model.....	79
Figure 32 — SCSI transport protocol service mode.....	80
Figure 33 — Request-Response SAL transaction and related STPL services	81
Figure 34 — SCSI transport protocol service model for data transfers.....	81
Figure 35 — Device server data transfer transaction and related STPL services	82
Figure 36 — SCSI transport protocol service model for Terminate Data Transfer	82
Figure 37 — Device server Terminate Data Transfer transaction and related STPL services	83
Figure 38 — Model for Data-In and Data-Out data transfers	93
Figure 39 — Command processing events.....	103
Figure 40 — Events and event notifications for SCSI target devices.....	115
Figure 41 — Events and event notifications for SCSI initiator devices	116
Figure 42 — Task management processing events.....	130
Figure 43 — Example of Dormant state command behavior	134
Figure 44 — Command states	136
Figure 45 — Commands having the HEAD OF QUEUE task attribute and blocking boundaries (example 1)...	138
Figure 46 — Commands having the HEAD OF QUEUE task attribute and blocking boundaries (example 2)...	139
Figure 47 — Commands having ORDERED task attributes and blocking boundaries.....	140
Figure 48 — Commands having ACA task attributes example	141

INFORMATION TECHNOLOGY – SMALL COMPUTER SYSTEM INTERFACE (SCSI) –

Part 414: Architecture model-4 (SAM-4)

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14776-414 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

The list of all currently available parts of the ISO/IEC 14776 series, under the general title *Information technology – Small computer system interface (SCSI)*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

INTRODUCTION

General

The set of SCSI (Small Computer System Interface) standards consists of this standard and the SCSI implementation standards (see SCSI Standards family). This standard defines a reference model that specifies common behaviors for SCSI devices, and an abstract structure that is generic to all SCSI I/O system implementations.

The set of SCSI standards specifies the interfaces, functions, and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

The following concepts are obsolete:

- a) support for the SPI-5 SCSI transport protocol (see SAM-2);
- b) contingent allegiance (see SAM-2);
- c) the TARGET RESET task management function (see SAM-2);
- d) basic task management model (see SAM-3);
- e) untagged tasks (see SAM-2); and
- f) linked command function (see SAM-3).

SCSI standards family

Figure 1 shows the relationship of this standard to the other standards and related projects in the SCSI family of standards as of the publication of this standard.

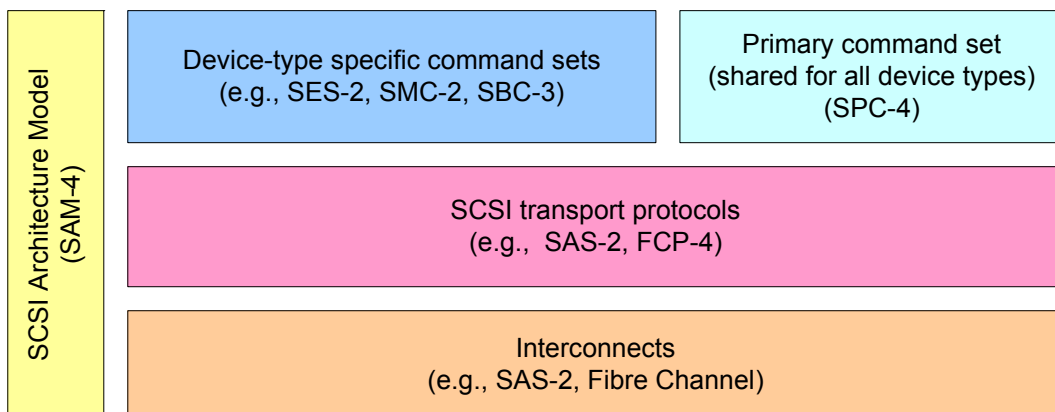


Figure 1 — SCSI standard structure

The SCSI standard structure in figure 1 is intended to show the general applicability of the standards to one another. Figure 1 is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture.

The functional areas identified in figure 1 characterize the scope of standards within a group as follows:

SCSI Architecture Model: Defines the SCSI systems model, the functional partitioning of the SCSI standard set and requirements applicable to all SCSI implementations and implementation standards.

Device-Type Specific Command Sets: Implementation standards that define specific device types including a device model for each device type. These standards specify the required commands and behaviors that are specific to a given device type and prescribe the requirements to be followed by a SCSI initiator device when sending commands to a SCSI target device having the specific device type. The commands and behaviors for a specific device type may include by reference commands and behaviors that are shared by all SCSI devices.

INFORMATION TECHNOLOGY – SMALL COMPUTER SYSTEM INTERFACE (SCSI) –

Part 414: Architecture model-4 (SAM-4)

1 Scope

This part of ISO/IEC 14776 defines a reference model that specifies common behaviors for SCSI devices and an abstract structure that is generic to all SCSI I/O system implementations.

This standard defines generic requirements that pertain to SCSI implementation standards. It also defines implementation requirements. An implementation requirement specifies behavior in terms of measurable or observable parameters that apply to an implementation. Examples of implementation requirements defined in this standard are the status values to be returned upon command completion and the service responses to be returned upon task management function completion.

Generic requirements are transformed to implementation requirements by an implementation standard. An example of a generic requirement is the hard reset behavior specified in 6.3.2.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

The provisions of the referenced specifications other than ISO, IEC, ISO and ITU standards, as identified in this clause, are valid within the context of this International Standard. The reference to such a specification within this International Standard does not give it any further status within ISO or IEC. In particular, it does not give the referenced specification the status of an International Standard.

ISO/IEC 14776-232, *Information technology - Small computer system interface (SCSI) - Part 232: Serial Bus Protocol 2 (SBP-2)*

ANSI INCITS 365-2002, *Small computer system interface (SCSI) Remote Direct Memory Access (RDMA) Protocol (SRP)*

ANSI INCITS 441-2008, *Automation/Drive Interface - Commands - 2 (ADC-2)*

NOTE 1 Copies of ANSI INCITS standards may be obtained through the ANSI Customer Service Department at 212-642-4900 (phone), 212-302-1286 (fax) or via the World Wide Web at <http://www.ansi.org>.

T10/1731-D, *Small computer system interface (SCSI) Primary Commands - 4 (SPC-4) (under consideration)*

T10/1799-D, *Small computer system interface (SCSI) Block Commands - 3 (SBC-3) (under consideration)*

T10/1828-D, *Fibre Channel Protocol for Small computer system interface (SCSI) - 4 (FCP-4) (under consideration)*

T10/1760-D, *Serial Attached Small computer system interface (SCSI) - 2 (SAS-2) (under consideration)*

T10/1742-D, *Automation/Drive Interface - Transport Protocol - 2 (ADT-2) (under consideration)*

NOTE 2 Copies of T10 draft standards may be obtained through Global Engineering Documents at 800-854-7179 or via the World Wide Web at <http://global.ihs.com>.

RFC 3720, *Internet Small Computer Systems Interface (iSCSI)*

NOTE 3 Copies of IETF standards may be obtained through the Internet Engineering Task Force (IETF) at <http://www.ietf.org>.

OMG Unified Modeling Language (UML) Specification Version 1.5, March 2003

NOTE 4 For more information on the UML specification, contact the Object Modeling Group at <http://www.omg.org>.