



INTERNATIONAL STANDARD

**Information technology – Generic cabling for customer premises –
Part 1: General requirements**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-5050-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	11
INTRODUCTION.....	13
1 Scope.....	15
2 Normative references	15
3 Terms, definitions, abbreviations and symbols.....	20
3.1 Terms and definitions.....	20
3.2 Abbreviations	27
3.3 Symbols.....	29
3.3.1 Variables	29
3.3.2 Indices.....	30
4 Conformance.....	30
5 Structure of generic cabling.....	31
5.1 Functional elements.....	31
5.2 Interfaces.....	32
5.3 Cabling subsystems.....	32
5.3.1 Cabling subsystem 1	32
5.3.2 Cabling subsystems $n \geq 2$	33
5.3.3 Common subsystems.....	33
5.3.4 Tie cabling.....	34
5.3.5 Channel and permanent link	34
6 Channel performance requirements	34
6.1 General.....	34
6.2 Environmental performance	34
6.2.1 General	34
6.2.2 Environmental classification.....	35
6.3 Balanced cabling transmission performance	37
6.3.1 General	37
6.3.2 Component choice	38
6.3.3 Channel parameters	38
6.4 Coaxial cabling transmission performance	64
6.4.1 General	64
6.4.2 Component choice	65
6.4.3 Channel parameters	65
6.5 Optical fibre cabling transmission performance	67
6.5.1 Component choice	67
6.5.2 Channel parameters	67
7 Link performance requirements	67
7.1 General.....	67
7.2 Balanced cabling	68
7.2.1 General	68
7.2.2 Return loss	69
7.2.3 Insertion loss/attenuation.....	70
7.2.4 NEXT.....	72
7.2.5 Attenuation to crosstalk ratio at the near-end.....	76
7.2.6 Attenuation to crosstalk ratio at the far-end	78
7.2.7 Direct current loop resistance	82

7.2.8	Direct current resistance unbalance	83
7.2.9	Propagation delay	83
7.2.10	Delay skew	84
7.2.11	Unbalance attenuation and coupling attenuation	86
7.2.12	Alien crosstalk	89
7.3	Coaxial cabling	94
7.3.1	General	94
7.3.2	Return loss	94
7.3.3	Insertion loss	94
7.3.4	Direct current loop resistance	95
7.3.5	DC current carrying capacity	95
7.3.6	Screening attenuation	95
7.4	Optical fibre cabling	95
8	Reference implementation for backbone cabling subsystems	96
8.1	General	96
8.2	Balanced cabling	96
8.2.1	Component choice	96
8.2.2	Dimensions	96
8.3	Optical fibre cabling	97
8.3.1	General	97
8.3.2	Component selection	98
8.3.3	Dimensions	98
9	Cable requirements	98
9.1	General	98
9.2	Operating environment	98
9.3	Balanced cables	98
9.3.1	Basic requirements	98
9.3.2	Balanced cables of Category 5 through 7 _A , 8.1 and 8.2	99
9.3.3	Balanced cables of Category BCT-B	101
9.4	Coaxial cables	103
9.4.1	General	103
9.4.2	Environmental characteristics	103
9.4.3	Mechanical characteristics	103
9.4.4	Electrical characteristics	104
9.5	Optical fibre cable (cabled optical fibres)	104
9.5.1	Mechanical and environmental characteristics	104
9.5.2	Cabled optical fibre Categories	105
10	Connecting hardware requirements	106
10.1	General requirements	106
10.1.1	Overview	106
10.1.2	Location	106
10.1.3	Design	106
10.1.4	Operating environment	107
10.1.5	Mounting	109
10.1.6	Installation practices	109
10.1.7	Marking and colour coding	110
10.2	Category 5 through 7 _A , 8.1, and 8.2 connecting hardware for balanced cabling	110

10.2.1	General	110
10.2.2	Performance marking.....	110
10.2.3	Mechanical characteristics.....	110
10.2.4	Electrical characteristics	112
10.2.5	Additional requirements	124
10.3	BCT-B connecting hardware	125
10.4	Connecting hardware for use with coaxial cabling for BCT applications.....	125
10.4.1	General requirements	125
10.4.2	Performance marking.....	125
10.4.3	Electrical characteristics	125
10.5	Optical fibre connecting hardware	126
10.5.1	General requirements	126
10.5.2	Marking and colour coding.....	127
10.5.3	Mechanical and optical characteristics.....	127
10.6	Connecting hardware in accordance with IEC 60603-7 series	128
10.7	Connecting hardware in accordance with IEC 61076-3-104.....	129
10.8	Connecting hardware in accordance with IEC 61076-2-101 (Type D, 4 poles).....	129
10.9	Connecting hardware in accordance with IEC 61076-2-109 (Type X, 8 poles).....	129
10.10	Connecting hardware in accordance with IEC 61169-2 and IEC 61169-24 (Type F).....	130
10.11	Connecting hardware for two optical fibres.....	130
10.12	Connecting hardware for twelve and twenty-four optical fibres	130
11	Cord requirements	131
11.1	General.....	131
11.2	Operating environment.....	131
11.3	Balanced cords of Category 5 through 7 _A , 8.1, 8.2 and BCT-B	131
11.3.1	General	131
11.3.2	Identification	131
11.3.3	Operating environment	132
11.3.4	Return loss	132
11.3.5	NEXT.....	132
11.4	Coaxial cords.....	135
11.5	Optical fibre cords.....	135
11.5.1	General	135
11.5.2	Identification	136
11.5.3	Performance requirements for patch cords	136
Annex A (normative) Conformance testing procedures for balanced cabling of Classes A to F _A , I and II and optical fibre cabling		137
A.1	General.....	137
A.2	Channel and link performance testing	137
A.2.1	General	137
A.2.2	Conformance testing of balanced cabling channels, and links.....	137
A.2.3	Installation conformance testing of optical fibre cabling channels	138
A.3	Overview of test schedules	138
Annex B (normative) Mechanical and environmental performance testing of connecting hardware for balanced cabling		141
B.1	Overview.....	141
B.2	Solderless connections	141
B.3	Free and fixed connectors (modular plugs and jacks).....	142

B.4	Other connecting hardware	143
Annex C (informative)	Electromagnetic characteristics	145
Annex D (informative)	Acronyms for balanced cables	146
Annex E (informative)	Supported applications	148
E.1	Supported applications for balanced cabling	148
E.2	Supported applications for optical fibre cabling	151
E.3	Supported applications for coaxial cabling	154
E.4	Supported industrial applications for optical fibre cabling	155
Annex F (informative)	Optical fibre cable OM1, OM2 and OS1	156
Bibliography	157
Figure 1	– Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25	14
Figure 2	– General functional elements	31
Figure 3	– Interconnect models	31
Figure 4	– Cross-connect models	32
Figure 5	– Equipment and test interfaces	32
Figure 6	– Link options	68
Figure 7	– Link designations	68
Figure 8	– Backbone cabling model	96
Figure 9	– Pin grouping and pair assignments for IEC 60603-7 series interface for Categories 5, 6, 6 _A and 8.1 (front view of fixed connector (jack), not to scale)	128
Figure 10	– Pin grouping and pair assignment for the IEC 60603-7 series interface for Categories 7, 7 _A , 8.2 and BCT-B (front view of fixed connector (jack), not to scale)	129
Figure 11	– Pin grouping and pair assignments for the IEC 61076-3-104 interface for Categories 7, 7 _A , 8.2 and BCT-B (front view of fixed connector (jack), not to scale)	129
Figure 12	– Four position jack pin and pair grouping assignments for IEC 61076-2-101 connecting hardware (front view of connector)	129
Figure 13	– Eight position jack pin and pair grouping assignments for IEC 61076-2-109 connecting hardware (front view of connector)	130
Figure 14	– Conductor assignment of IEC 61169-2 and IEC 61169-24 (Type F) connector	130
Figure 15	– Optical fibre assignments for connecting hardware for two optical fibres	130
Figure 16	– Optical fibre assignments for connecting hardware for 12 and 24 optical fibres (front view of fixed or free connector)	131
Figure D.1	– Cable naming schema	146
Figure D.2	– Cable types	147
Table 1	– Channel environments	35
Table 2	– Details of environmental classification	36
Table 3	– Return loss for a channel	39
Table 4	– Informative return loss values for a channel at key frequencies	40
Table 5	– Insertion loss for a channel	41
Table 6	– Informative insertion loss values for a channel at key frequencies	42
Table 7	– NEXT for a channel	43
Table 8	– Informative NEXT values for a channel at key frequencies	44

Table 9 – PS NEXT for a channel	45
Table 10 – Informative PS NEXT values for a channel at key frequencies	46
Table 11 – Informative ACR-N values for a channel at key frequencies	47
Table 12 – Informative PS ACR-N values for a channel at key frequencies	48
Table 13 – ACR-F for a channel.....	49
Table 14 – Informative ACR-F values for a channel at key frequencies	50
Table 15 – PS ACR-F for a channel	51
Table 16 – Informative PS ACR-F values for a channel at key frequencies.....	52
Table 17 – DC loop resistance for a channel.....	52
Table 18 – Propagation delay for a channel	53
Table 19 – Informative propagation delay values for a channel at key frequencies	54
Table 20 – Delay skew for a channel	55
Table 21 – TCL for channel for unscreened systems.....	56
Table 22 – Informative TCL values for unscreened channels at key frequencies	56
Table 23 – TCL for Class I and II screened channels	56
Table 24 – Informative TCL values for Class I and II screened channels at key frequencies.....	57
Table 25 – ELTCTL for channel for unscreened systems.....	57
Table 26 – Informative ELTCTL values for unscreened channels at key frequencies	58
Table 27 – ELTCTL for Class I and II channels	58
Table 28 – Informative ELTCTL values for Class I and II channels at key frequencies	58
Table 29 – Coupling attenuation for a channel for screened systems	59
Table 30 – PS ANEXT for a channel	60
Table 31 – Informative PS ANEXT values for a channel at key frequencies.....	60
Table 32 – PS ANEXT _{avg} for a channel.....	61
Table 33 – Informative PS ANEXT _{avg} values for a channel at key frequencies	61
Table 34 – PS AACR-F for a channel.....	62
Table 35 – Informative PS AACR-F values for a channel at key frequencies	63
Table 36 – PS AACR-F _{avg} for a channel	63
Table 37 – Informative PS AACR-F _{avg} values for a channel at key frequencies.....	64
Table 38 – Alien crosstalk and coupling attenuation for screened channels.....	64
Table 39 – Return loss for a channel.....	65
Table 40 – Insertion loss for a channel	65
Table 41 – Informative insertion loss values for a channel at key frequencies	66
Table 42 – DC loop resistance for a channel.....	66
Table 43 – DC current carrying capacity for a channel	66
Table 44 – Operating voltage for a channel.....	66
Table 45 – Screening attenuation for a channel	67
Table 46 – Return loss for 2-connection or 3-connection link	69
Table 47 – Informative return loss values for links at key frequencies	70
Table 48 – Insertion loss for 2-connection or 3-connection link	71
Table 49 – Informative insertion loss values for links with maximum implementation at key frequencies	72

Table 50 – NEXT for 2-connection or 3-connection link.....	72
Table 51 – Informative NEXT values for links with maximum implementation at key frequencies.....	74
Table 52 – PS NEXT for 2-connection or 3-connection link	75
Table 53 – Informative PS NEXT values for links with maximum implementation at key frequencies.....	76
Table 54 – Informative ACR-N values for links with maximum implementation at key frequencies.....	77
Table 55 – Informative PS ACR-N values for links with maximum implementation at key frequencies.....	78
Table 56 – ACR-F for 2-connection or 3-connection link	79
Table 57 – Informative ACR-F values for links with maximum implementation at key frequencies.....	80
Table 58 – PS ACR-F for 2-connection or 3-connection link	81
Table 59 – Informative PS ACR-F values for links with maximum implementation at key frequencies	82
Table 60 – DC loop resistance for 2-connection or 3-connection link.....	82
Table 61 – Informative DC loop resistance for links with maximum implementation.....	83
Table 62 – Propagation delay for 2-connection or 3-connection link	84
Table 63 – Informative propagation delay values for links with maximum implementation at key frequencies	84
Table 64 – Delay skew for 2-connection or 3-connection link	85
Table 65 – Informative delay skew for links with maximum implementation	86
Table 66 – TCL for Class I and II screened permanent links.....	87
Table 67 – Informative TCL values for Class I and II screened permanent links at key frequencies.....	87
Table 68 – ELTCTL for Class I and II permanent links	88
Table 69 – Informative ELTCTL values for Class I and II permanent links at key frequencies.....	88
Table 70 – Coupling attenuation for a screened permanent link	89
Table 71 – Informative coupling attenuation values for screened permanent links at key frequencies	89
Table 72 – PS ANEXT for 2-connection or 3-connection link	90
Table 73 – Informative PS ANEXT values for links at key frequencies.....	91
Table 74 – PS ANEXT _{avg} for 2-connection or 3-connection link.....	91
Table 75 – Informative PS ANEXT _{avg} values for links at key frequencies	92
Table 76 – PS AACR-F for 2-connection or 3-connection link.....	92
Table 77 – Informative PS AACR-F values for links at key frequencies	93
Table 78 – PS AACR-F _{avg} for a 2-connection or 3-connection link	93
Table 79 – Informative PS AACR-F _{avg} values for links at key frequencies.....	94
Table 80 – Alien crosstalk and coupling attenuation for screened links	94
Table 81 – Insertion loss for link	95
Table 82 – Informative insertion loss values for link at key frequencies.....	95
Table 83 – DC loop resistance for link.....	95
Table 84 – Backbone link length equations	97

Table 85 – Basic requirements of balanced cables.....	99
Table 86 – Mechanical characteristics of balanced cables of Category 5, 6, 6A, 7 and 7A	99
Table 87 – Mechanical characteristics of balanced cables of Category BCT-B	102
Table 88 – Minimum transmission performance requirements BCT-B balanced pairs	102
Table 89 – Basic requirements of coaxial cables	103
Table 90 – Mechanical performance requirements for coaxial BCT cables	103
Table 91 – Minimum electrical performance requirements for cables of Category BCT-C	104
Table 92 – Cabled optical fibre attenuation (maximum), dB/km	105
Table 93 – Multimode optical fibre modal bandwidth	105
Table 94 – Environmental performance specifications for balanced cabling connecting hardware	107
Table 95 – Environmental performance specifications for coaxial cabling connecting hardware	108
Table 96 – Environmental performance specifications for optical fibre cabling connecting hardware.....	109
Table 97 – Mechanical characteristics of connecting hardware for use with balanced cabling.....	111
Table 98 – Matrix of backward compatible mated free and fixed connector (plug and jack) performance	113
Table 99 – Return loss	113
Table 100 – Informative return loss values for connector at key frequencies	114
Table 101 – Insertion loss.....	114
Table 102 – Informative insertion loss values for connector at key frequencies	115
Table 103 – Near-end crosstalk (NEXT).....	115
Table 104 – Informative NEXT values for connector at key frequencies	116
Table 105 – Power sum near-end crosstalk (PS NEXT) (for information only)	116
Table 106 – Informative PS NEXT values for connector at key frequencies	117
Table 107 – Far-end crosstalk (FEXT)	117
Table 108 – Informative FEXT values for connector at key frequencies.....	118
Table 109 – Power sum far-end crosstalk (PS FEXT) (for information only).....	118
Table 110 – Informative PS FEXT values for connector at key frequencies	119
Table 111 – Input to output resistance	119
Table 112 – Input to output resistance unbalance	119
Table 113 – DC current carrying capacity	119
Table 114 – Propagation delay	120
Table 115 – Delay skew.....	120
Table 116 – Transverse conversion loss (TCL)	120
Table 117 – Informative TCL values for connector at key frequencies	121
Table 118 – Transverse conversion transfer loss (TCTL)	121
Table 119 – Informative TCTL values for connector at key frequencies	121
Table 120 – Transfer impedance (screened connectors only).....	122
Table 121 – Informative transfer impedance values (screened connectors only) at key frequencies.....	122

Table 122 – Coupling attenuation (screened connectors only)	122
Table 123 – Informative coupling attenuation values (screened connectors only) at key frequencies	122
Table 124 – Insulation resistance	123
Table 125 – Voltage proof	123
Table 126 – Power sum alien near-end crosstalk (PS ANEXT)	123
Table 127 – Informative PS ANEXT values at key frequencies	123
Table 128 – Power sum alien far-end crosstalk (PS AFEXT)	124
Table 129 – Informative PS AFEXT values at key frequencies	124
Table 130 – Coupling attenuation for BCT-B connecting hardware	125
Table 131 – Formulae for return loss limits for BCT-C connecting hardware	125
Table 132 – Return loss limits for BCT-C connecting hardware at key frequencies	126
Table 133 – Formulae for insertion loss limits for BCT-C connecting hardware	126
Table 134 – Insertion loss limits for BCT-C connecting hardware at key frequencies	126
Table 135 – Screening attenuation limits for BCT-C connecting hardware	126
Table 136 – Attenuation of connecting hardware for optical fibre	127
Table 137 – Return loss of optical fibre connecting hardware	127
Table 138 – Electrical characteristics of terminal equipment outlets intended for use with balanced cabling	128
Table 139 – Minimum return loss for balanced cords	132
Table 140 – Informative values of return loss for balanced cords at key frequencies	132
Table 141 – Assumptions for cabling components used in the calculation of NEXT informative values	134
Table 142 – Informative values of NEXT for 2 m balanced cords at key frequencies	134
Table 143 – Informative values of NEXT for 5 m balanced cords at key frequencies	135
Table 144 – Informative values of NEXT for 10 m balanced cords at key frequencies	135
Table A.1 – Test regime for reference conformance and installation conformance – Balanced cabling of Classes A through F _A , BCT-B, I and II	139
Table A.2 – Test regime for reference conformance and installation conformance – Optical fibre cabling	140
Table B.1 – Standards for solderless connections	141
Table B.2 – Standards for free and fixed connectors (modular plugs and jacks)	142
Table B.3 – Standards for M12 style connectors	142
Table B.4 – Free and fixed connectors (modular plugs and jacks) operations matrix	143
Table B.5 – Reference for reliability testing of other connecting hardware	143
Table B.6 – Other connecting hardware operations matrix	144
Table E.1 – Applications using balanced cabling	149
Table E.2 – Industrial applications using balanced cabling	150
Table E.3 – Modular connector pin assignment for applications	151
Table E.4 – Maximum channel attenuation for supported applications using optical fibre cabling	152
Table E.5 – Maximum channel lengths supported by optical fibre applications for multimode optical fibre	153
Table E.6 – Maximum channel length supported by optical fibre applications for single-mode optical fibre	154

Table E.7 – Supported BCT applications using balanced cabling	154
Table E.8 – Supported BCT applications using coaxial cabling	155
Table E.9 – Supported applications and maximum channel lengths with cabled multimode optical fibres	155
Table E.10 – Supported applications and maximum channel lengths with cabled all-silica single-mode optical fibres	155
Table F.1 – Grandfathered OM1, OM2 and OS1 specifications.....	156
Table F.2 – Supported applications and maximum channel lengths with cabled all-silica multimode optical fibres	156
Table F.3 – Supported applications and maximum channel lengths with cabled all-silica singlemode optical fibres	156

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 11801-1 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition, together with ISO/IEC 11801-2, cancels and replaces ISO/IEC 11801:2002, Amendment 1:2008 and Amendment 2:2010. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) standard re-structured to contain those elements and requirements, that are common to generic cabling systems (in application fields such as offices and industrial premises), namely requirements for common elements of topology and transmission performance of channels, links and related components;
- b) addition of balanced cabling channel and link Classes BCT-B, I and II;
- c) addition of coaxial cabling channel and link Class BCT-C;
- d) addition of balanced cabling component requirements for Category BCT-B, 8.1, and 8.2;

- e) addition of coaxial cabling component requirements for Category BCT-C;
- f) addition of cabled fibres of Category OS1a, and OM5;
- g) removal of silica optical fibre cabling;
- h) optical fibre cable OM1, OM2 and OS1 has been moved to an informative annex.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the ISO/IEC 11801 series, published under the general title *Information technology – Generic cabling for customer premises*, can be found on the IEC website.

INTRODUCTION

This document contains general requirements in support of the other premises-specific referenced cabling design documents developed by ISO/IEC JTC 1/SC 25 including ISO/IEC 11801-2, ISO/IEC 11801-3, ISO/IEC 11801-4, ISO/IEC 11801-5, ISO/IEC 11801-6 and related Technical Reports (including the ISO/IEC TR 11801-99xx series, ISO/IEC TR 24704, ISO/IEC TR 24750 and ISO/IEC TR 29125).

This document specifies a multi-vendor cabling system which may be implemented with material from single or multiple sources, and is related to:


- a) International Standards for cabling components developed by technical committees of the IEC, for example copper cables and connectors as well as optical fibre cables and connectors (see Clause 2 and bibliography);
- b) standards for the testing of installed cabling (see Clause 2 and bibliography);
- c) applications developed by technical committees of the IEC, by subcommittees of ISO/IEC JTC 1, by study groups of ITU-T, for example for LANs and ISDN, and by IEEE 802;
- d) planning and installation guides and other standards which take into account the needs of specific applications for the configuration and the use of cabling systems on customer premises (e.g. ISO/IEC 14709 series, ISO/IEC 14763 series, ISO/IEC 30129, and ISO/IEC 18598).

Physical layer requirements for the applications listed in Annex E have been analysed to determine their compatibility with cabling classes specified in this document. These application requirements, together with statistics concerning premises-specific topologies and cabling models of the supported standards, have been used to develop the requirements for balanced, coaxial and optical fibre cabling.

As a result, generic cabling defined within this document:

- 1) specifies balanced cabling channel and link Classes A, B, C, D, E, E_A, F, F_A, I and II meeting both the requirements of standardized applications and to support the development and implementation of future applications;
- 2) specifies balanced cabling channel and link Class BCT-B to support the delivery of BCT applications;
- 3) specifies coaxial cabling channel and link Class BCT-C to support the delivery of BCT applications;
- 4) specifies optical fibre cabling meeting the requirements of standardized applications and exploiting component capabilities to ease the implementation of applications developed in the future;
- 5) invokes component requirements and specifies cabling implementations that ensure performance of links and of channels that meet or exceed the requirements for cabling classes.

Figure 1 shows the schematic and contextual relationships between the standards relating to information technology cabling produced by ISO/IEC JTC 1/SC 25, namely the ISO/IEC 11801 series of standards for generic cabling design, standards for the installation, operation and administration of generic cabling and for testing of installed generic cabling.

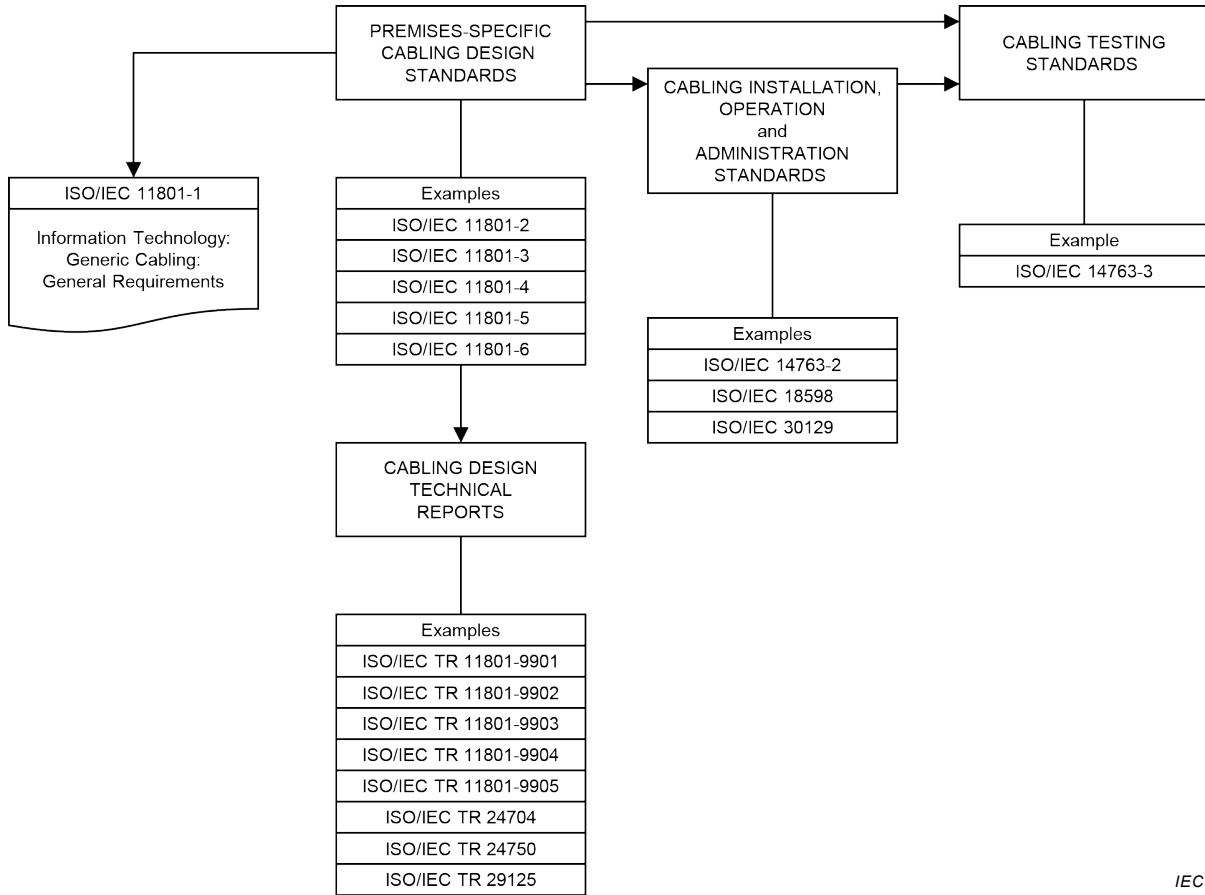

IEC

Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25

This document refers to International Standards for components and test methods wherever appropriate International Standards are available.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

1 Scope

This part of ISO/IEC 11801 specifies requirements that are common to the other parts of the ISO/IEC 11801 series. Cabling specified by this document supports a wide range of services including voice, data, and video that may also incorporate the supply of power.

This document specifies:

- a) the fundamental structure and configuration of generic cabling requirements within the types of premises defined by the other parts of the ISO/IEC 11801 series,
- b) channel transmission and environmental performance requirements,
- c) link performance requirements,
- d) backbone cabling reference implementations in support of the parts of the ISO/IEC 11801 series,
- e) component performance requirements, referring to available International Standards for components and test methods where appropriate,
- f) test procedures to verify conformance to the cabling transmission performance requirements of the ISO/IEC 11801 series.

NOTE This document does not contain specific conformance requirements. The cabling design documents supported by ISO/IEC 11801-1 incorporate the requirements of this document as part of their individual conformance requirements.

In addition, this document provides information regarding the applications supported by the cabling channels.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60352-2, *Solderless connections – Part 2: Crimped connections – General requirements, test methods and practical guidance*

IEC 60352-3, *Solderless connections – Part 3: Solderless accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-4, *Solderless connections – Part 4: Solderless non-accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-5, *Solderless connections – Part 5: Press-in connections – General requirements, test methods and practical guidance*

IEC 60352-6, *Solderless connections – Part 6: Insulation piercing connections – General requirements, test methods and practical guidance*

IEC 60352-7, *Solderless connections – Part 7: Spring clamp connections – General requirements, test methods and practical guidance*

IEC 60352-8, *Solderless connections – Part 8: Compression mount connections – General requirements, test methods and practical guidance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-4-2, *Connectors for electronic equipment – Tests and measurements – Part 4-2: Voltage stress tests – Test 4b: Partial discharge*

IEC 60512-6-2, *Connectors for electronic equipment – Tests and measurements – Part 6-2: Dynamic stress tests – Test 6b: Bump*

IEC 60512-6-3, *Connectors for electronic equipment – Tests and measurements – Part 6-3: Dynamic stress tests – Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment – Tests and measurements – Part 6-4: Dynamic stress tests – Test 6d: Vibration (sinusoidal)*

IEC 60512-11-4, *Connectors for electronic equipment – Tests and measurements – Part 11-4: Climatic tests – Test 11d: Rapid change of temperature*

IEC 60512-11-7, *Connectors for electronic equipment – Tests and measurements – Part 11-7: Climatic tests – Test 11g: Flowing mixed gas corrosion test*

IEC 60512-11-9, *Connectors for electronic equipment – Tests and measurements – Part 11-9: Climatic tests – Test 11i: Dry heat*

IEC 60512-11-10, *Connectors for electronic equipment – Tests and measurements – Part 11-10: Climatic tests – Test 11j: Cold*

IEC 60512-11-12, *Connectors for electronic equipment – Tests and measurements – Part 11-12: Climatic tests – Test 11m: Damp heat, cyclic*

IEC 60512-16-4, *Connectors for electronic equipment – Tests and measurements – Part 16-4: Mechanical tests on contacts and terminations – Test 16d: Tensile strength (crimped connections)*

IEC 60512-17-4, *Connectors for electronic equipment – Tests and measurements – Part 17-4: Cable clamping tests – Test 17d: Cable clamp resistance to cable torsion*

IEC 60512-19-3, *Electromechanical components for electronic equipment – Basic testing procedures and measuring methods – Part 19: Chemical resistance tests – Section 3: Test 19c – Fluid resistance*

IEC 60512-23-3, *Electromechanical components for electronic equipment – Basic testing procedures and measuring methods – Part 23-3: Test 23c: Shielding effectiveness of connectors and accessories*

IEC 60512-99-001, *Connectors for electronic equipment – Tests and measurements – Part 99-001: Test schedule for engaging and separating connectors under electrical load – Test 99a: Connectors used in twisted pair communication cabling with remote power*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60603-7, *Connectors for electronic equipment – Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*

IEC 60603-7-1, *Connectors for electronic equipment – Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors*

IEC 60603-7-2, *Connectors for electronic equipment – Part 7-2: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz*

IEC 60603-7-3, *Connectors for electronic equipment – Part 7-3: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 100 MHz*

IEC 60603-7-4, *Connectors for electronic equipment – Part 7-4: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

IEC 60603-7-5, *Connectors for electronic equipment – Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*

IEC 60603-7-7, *Connectors for electronic equipment – Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors for data transmission with frequencies up to 600 MHz*

IEC 60603-7-41, *Connectors for electronic equipment – Part 7-41: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-51, *Connectors for electronic equipment – Part 7-51: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*

IEC 60603-7-71, *Connectors for electronic equipment – Part 7-71: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 1 000 MHz*

IEC 60603-7-81, *Connectors for electronic equipment – Part 7-81: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 2 000 MHz*

IEC 60603-7-82, *Connectors for electronic equipment – Part 7-82: Detail specification for 8-way, 12 contacts, shielded, free and fixed connectors, for data transmission with frequencies up to 2 000 MHz*

IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60793-2-10, *Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 60794-1-21, *Optical fibre cables – Part 1-21: Generic specification – Basic optical cable test procedures – Mechanical test methods*

IEC 60794-1-22, *Optical fibre cables – Part 1-22: Generic specification – Basic optical cable test procedures – Environmental test methods*

IEC 60794-2, *Optical fibre cables – Part 2: Indoor cables – Sectional specification*

IEC 60794-2-51, *Optical fibre cables – Part 2-51: Indoor cables – Detail specification for simplex and duplex cables for use in cords for controlled environment*

IEC 60794-3, *Optical fibre cables – Part 3: Outdoor cables – Sectional specification*

IEC 60794-5, *Optical fibre cables – Part 5: Sectional specification – Microduct cabling for installation by blowing*

IEC 60966-2-4, *Radio frequency and coaxial cable assemblies – Part 2-4: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3 000 MHz, IEC 61169-2 connectors*

IEC 60966-2-5, *Radio frequency and coaxial cable assemblies – Part 2-5: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 1 000 MHz, IEC 61169-2 connectors*

IEC 60966-2-6, *Radio frequency and coaxial cable assemblies – Part 2-6: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3000 MHz, IEC 61169-24 connectors*

IEC 61076-2-101, *Connectors for electronic equipment – Product requirements – Part 2-101: Circular connectors – Detail specification for M12 connectors with screw-locking*

IEC 61076-2-109, *Connectors for electronic equipment – Product requirements – Part 2-109: Circular connectors – Detail specification for connectors with M 12 × 1 screw-locking, for data transmission frequencies up to 500 MHz*

IEC 61076-3-104, *Connectors for electrical and electronic equipment – Product requirements – Part 3-104: Detail specification for 8-way, shielded free and fixed connectors for data transmissions with frequencies up to 2000 MHz*

IEC 61076-3-106, *Connectors for electronic equipment – Product requirements – Part 3-106: Rectangular connectors – Detail specification for protective housings for use with 8-way shielded and unshielded connectors for industrial environments incorporating the IEC 60603-7 series interface*

IEC 61076-3-110, *Connectors for electronic equipment – Product requirements – Part 3-110: Detail specification for shielded, free and fixed connectors for data transmission with frequencies up to 3000 MHz*

IEC 61156 (all parts), *Multicore and symmetrical pair/quad cables for digital communications*

IEC 61156-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 1: Generic specification*

IEC 61156-2, *Multicore and symmetrical pair/quad cables for digital communications – Part 2: Symmetrical pair/quad cables with transmission characteristics up to 100 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-3, *Multicore and symmetrical pair/quad cables for digital communications – Part 3: Work area cable – Sectional specification*

IEC 61156-4, *Multicore and symmetrical pair/quad cables for digital communications – Part 4: Riser cables – Sectional specification*

IEC 61156-5:2009, *Multicore and symmetrical pair/quad cables for digital communications – Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-5:2009/AMD1:2012

IEC 61156-5-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 5-1: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Horizontal floor wiring – Blank detail specification*

IEC 61156-6, *Multicore and symmetrical pair/quad cables for digital communications – Part 6: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Work area wiring – Sectional specification*

IEC 61156-6-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 6-1: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Work area wiring – Blank detail specification*

IEC 61156-7, *Multicore and symmetrical pair/quad cables for digital communications – Part 7: Symmetrical pair cables with transmission characteristics up to 1200 MHz – Sectional specification for digital and analog communication cables*

IEC 61156-9:2016, *Multicore and symmetrical pair/quad cables for digital communications – Part 9: Cables for channels with transmission characteristics up to 2 GHz – Sectional specification*

IEC 61156-10, *Multicore and symmetrical pair/quad cables for digital communications – Part 10: Cables for cords with transmission characteristics up to 2 GHz – Sectional specification*

IEC 61169-2, *Radio-frequency connectors – Part 2: Sectional specification – Radio frequency coaxial connectors of type 9,52*

IEC 61169-24, *Radio-frequency connectors – Part 24: Sectional specification – Radio frequency coaxial connectors with screw coupling, typically for use in 75 Ω cable networks (type F)*

IEC 61196-1, *Coaxial communication cables – Part 1: Generic specification – General, definitions and requirements*

IEC 61196-6, *Coaxial communication cables – Part 6: Sectional specification for CATV drop cables*

IEC 61196-7, *Coaxial communication cables – Part 7: Sectional specification for cables for BCT cabling in accordance with ISO/IEC 15018 – Indoor drop cables for systems operating at 5 MHz – 3 000 MHz*

IEC 61300-2-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-1: Tests – Vibration (sinusoidal)*

IEC 61300-2-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-4: Tests – Fibre/cable retention*

IEC 61300-2-5, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-5: Tests – Torsion*

IEC 61300-2-9, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-9: Tests – Shock*

IEC 61300-2-18, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-18: Tests – Dry heat – High temperature endurance*

IEC 61300-2-22, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-22: Tests – Change of temperature*

IEC 61300-2-34, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-34: Tests – Resistance to solvents and contaminating fluids of interconnecting components and closures*

IEC 61300-2-44, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-44: Tests – Flexing of the strain relief of fibre optic devices*

IEC 61300-2-46, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-46: Tests – Damp heat, cyclic*

IEC 61753-1, *Fibre optic interconnecting devices and passive components – Performance standard – Part 1: General and guidance for performance standards*

IEC 61753-021-2, *Fibre optic interconnecting devices and passive components – Performance standard – Part 021-2: Grade C/3 single-mode fibre optic connectors for category C – Controlled environment*

IEC 61753-022-2, *Fibre optic interconnecting devices and passive components – Performance standard – Part 022-2: Fibre optic connectors terminated on multimode fibre for category C – Controlled environment*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 61754-20-100, *Fibre optic interconnecting devices and passive components – Part 20-100: Interface standard for LC connectors with protective housings related to IEC 61076-3-106*

IEC 61935-1, *Specification for the testing of balanced and coaxial information technology cabling – Part 1: Installed balanced cabling as specified in ISO/IEC 11801 and related standards*

IEC 61935-2, *Specification for the testing of balanced and coaxial information technology cabling – Part 2: Cords as specified in ISO/IEC 11801 and related standards*

IEC 62012-1, *Multicore and symmetrical pair/quad cables for digital communications to be used in harsh environments – Part 1: Generic specification*

IEC 62664-1-1, *Fibre optic interconnecting devices and passive components – Fibre optic connector product specifications – Part 1-1: LC-PC duplex multimode connectors terminated on IEC 60793-2-10 category A1a fibre*

ISO 4892-1, *Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance*

ISO 4892-2, *Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc lamps*

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC 14763-3, *Information technology – Implementation and operation of customer premises cabling – Part 3: Testing of optical fibre cabling*